

2023

Commercial Light

XIAMEN SIMONS LIGHTING CO.,LTD

ADD:

NO.3 ZHONG WANG ROAD, XINGLIN, JIMEI DISTRICT, XIAMEN, CHINA

WEB: WWW.SIMONSLED.COM

EMAIL: INFO@SIMONSLED.COM

TEL: +86 17880320846

XIAMEN SIMONS LIGHTING CO.,LTD

Professional Team

Established in 2012, Simons lighting specialized in R&D and production of commercial lighting and related LED Lights.

We have over 6000 square meter standard workshop and laboratory and operates under ISO9001. We have a creative and dynamic team like design, R&D center, purchasing, project management, manufacturing, assembly and quality control.

During the past years, Simons lighting is pride itself in offering quality products to a wide range of customers. In the future, our commitment is to be the first choice of yours, and we hope that our professional will inspire your confident in Simons lighting.


SIMONS LIGHTING

SIMONS






Downlight

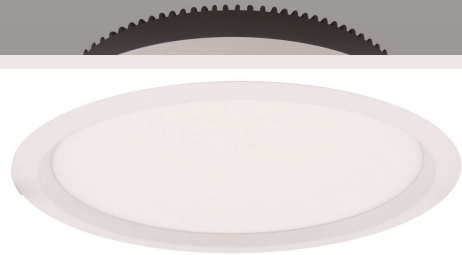

DL34 Downlight

1. Durable die-cast aluminum body profile with a round trim profile
2. External triac-dimmable driver, long lifespan
3. 4 sizes are optional, suitable for different cut-out
4. High efficiency SMD LED chips, 100 degree reflector system
5. 3-CCT switchable, easily to help you to reduce stock
6. Constant current dimmable LED driver with flex and plug
7. The fascia is optional to white, black and chrome




PRODUCT OVERVIEW

	DL34-03	DL34-05	DL34-06	DL34-08
Wattage	10W	15W	24W	30W
Beam Angle	100°	100°	100°	100°
Lumens Efficiency(lm/w)	110lm/w	110lm/w	110lm/w	110lm/w
Lumen(lm)	1100lm	1650lm	2640lm	3300lm
IP Rated	IP44	IP44	IP44	IP44
Materials	Aluminum	Aluminum	Aluminum	Aluminum
Cut-out	88mm	135mm	163mm	205mm
Size	∅95×35mm	∅140×35mm	∅170×35mm	∅220×35mm



DIMENSIONS

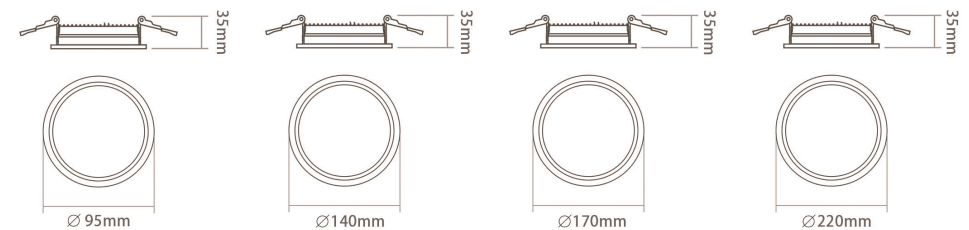




PRODUCT OVERVIEW


	DL05-03	DL05-04	DL05-05	DL05-06	DL05-07
Wattage	10W/12W	18W/20W	25W/28W	35W/40W	55W/60W
Beam Angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°
Lumens Efficiency(lm/w)	70lm/w	70lm/w	70lm/w	70lm/w	70lm/w
Lumen(lm)	700lm/840lm	1260lm/1400lm	1750lm/1960lm	2450lm/ 2800lm	3850lm/4200lm
IP Rated	IP20	IP20	IP20	IP20	IP20
Materials	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Cut-out	90mm	110mm	125mm	145mm	175mm
Size	∅102 xH80mm	∅125 xH108mm	∅140 xH115mm	∅160xH135mm	∅190xH135mm

DL05 Downlight

1. Advanced thermal conductive plastics radiator
2. Built-in driver, fit for most of branded dimmers including leading edge dimmer
3. Tri-colour design, can reduce your stock
4. Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
5. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




DIMENSIONS

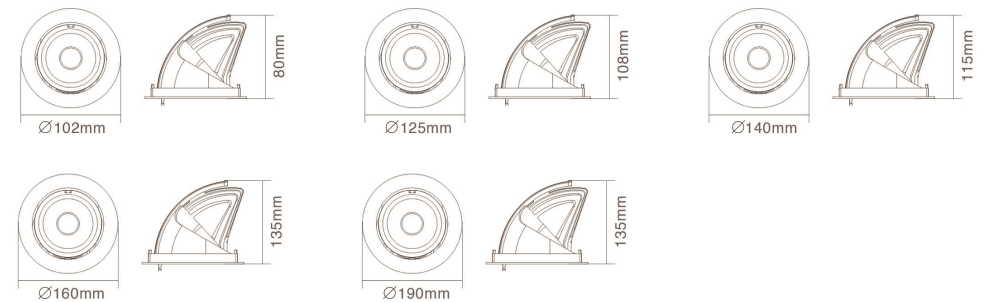



DL16 Downlight

1. Strong heat dissipation of the heatsink, IC-4 rated
2. Constant current trailing edge dimmable and non-dimmable driver configurations fitted with flex and plug
3. 3-CCT function is optional, CCT smooth adjustable switch on the driver
4. High efficiency SMD LED chips
5. Deep Anti-glare design
6. IP44 protection degree for indoor use
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart ccontrol
8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




PRODUCT OVERVIEW

	DL16-02	DL16-03	DL16-04	DL16-06
Wattage	8W/10W/12W	12W/13W/15W	18W/22W/24W	25W/30W/36W
Beam Angle	24°	24°	24°	24°
Lumens Efficiency(lm/w)	70lm/w	70lm/w	70lm/w	70lm/w
Lumen(lm)	560lm/700lm/840lm	840lm/910lm/1050lm	1260lm/1540lm/1680lm	1750lm/2100lm/2520lm
IP Rated	IP44	IP44	IP44	IP44
Materials	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Cut-out	80mm	95mm	120mm	150mm
Size	∅ 94xH64mm	∅ 114xH68mm	∅ 140xH74mm	∅ 184xH80mm




DIMENSIONS

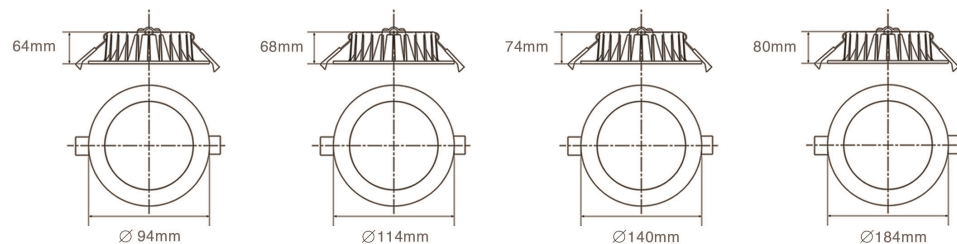



DL16-IP Downlight

1. Durable die-cast aluminum body profile, IC-4 rated
2. High efficiency SMD LED chips, up to 100lm/w
3. Anti-dazzle cup on the light, UGR<19
4. Constant current trailing edge dimmable and non-dimmable driver configurations fitted with flex and plug
5. IP54 protection degree for indoor use
6. Optional to 3-CCT and single CCT, 3-CCT can help you to reduce the stock
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart ccontrol8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




PRODUCT OVERVIEW

	DL16-02-IP	DL16-03-IP	DL16-04-IP	DL16-06-IP
Wattage	8W/10W/12W	12W/13W/15W	18W/22W/24W	25W/30W/36W
Beam Angle	90°	90°	90°	90°
Lumens Efficiency(lm/w)	100lm/w	100lm/w	100lm/w	100lm/w
Lumen(lm)	800lm/1000lm/1300lm	1200lm/1300lm/1500lm	1800lm/2200lm/2400lm	2500lm/3000lm/3600lm
IP Rated	IP54	IP54	IP54	IP54
Materials	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Cut-out	80mm	95mm	120mm	150mm
Size	∅ 94xH64mm	∅ 114xH68mm	∅ 140xH74mm	∅ 184xH80mm




DIMENSIONS

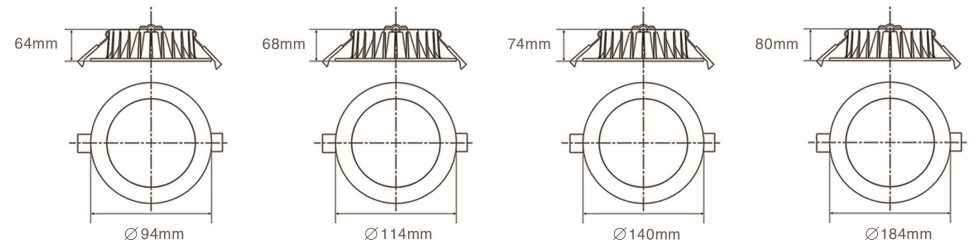




DL22 Downlight

1. Die-casting aluminum housing, excellent heat dissipation
2. External triac-dimmable driver, long lifespan.
3. Inside fascia are optional to be silver, black, white
4. Excellent matt white powder coat finish, the colour can be customized
5. Deep anti-glare design, UGR<19
6. IC-4 rated
7. IP67, whole lamp can be soaked in water




PRODUCT OVERVIEW

	DL22-03	DL22-05	DL22-07	DL22-08
Wattage	10W	18W	25W	36W
Beam Angle	40°	40°	40°	40°
Lumens Efficiency(lm/w)	90lm/w	90lm/w	90lm/w	90lm/w
Lumen(lm)	900lm	1620lm	2250lm	3240lm
IP Rated	IP67	IP67	IP67	IP67
Materials	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Cut-out	90mm	130mm	170mm	200mm
Size	∅100xH57mm	∅140xH90mm	∅185xH112mm	∅230xH128mm

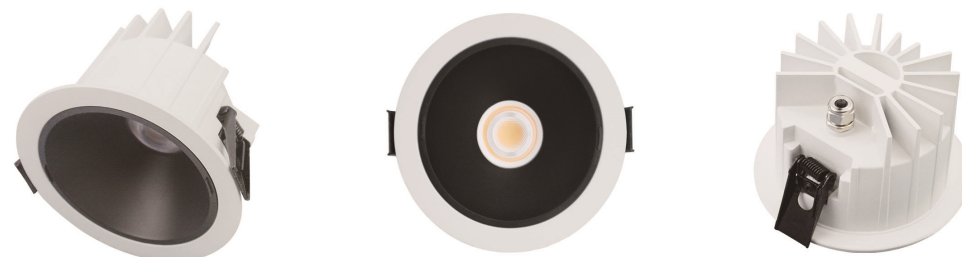

DIMENSIONS

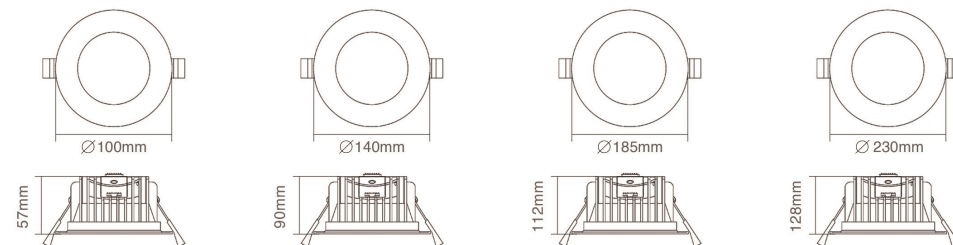




PRODUCT OVERVIEW


	DL23-03	DL23-04	DL23-06	DL23-08
Wattage	10/12/15W	15/18/20W	20/25/30W	35/45/50W
Beam Angle	60°	60°	60°	60°
Lumens Efficiency(lm/w)	90lm/w	90lm/w	90lm/w	90lm/w
Lumen(lm)	900/1080/1350lm	1350/1620/1800lm	1800/2250/2700lm	3150/4050/4500lm
IP Rated	IP65	IP65	IP65	IP65
Materials	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Cut-out	90mm	120mm	170mm	190mm
Size	∅110xH90mm	∅135xH110mm	∅180xH125mm	∅210xH137mm

DL23 Downlight

1. Die-casting aluminum housing, excellent heat dissipation
2. External triac-dimmable driver, long lifespan
3. Inside fascia are optional to be silver, black, white
4. Excellent matt white powder coat finish, the colour can be customized
5. Deep anti-glare design, UGR<19
6. IC-4 rated
7. The light and the LED driver both have IP65 rated weatherproof construction. This downlight is ideal for all interior uses, including wet areas, such as bathrooms and laundries. It is also suitable for some outdoor areas




DIMENSIONS

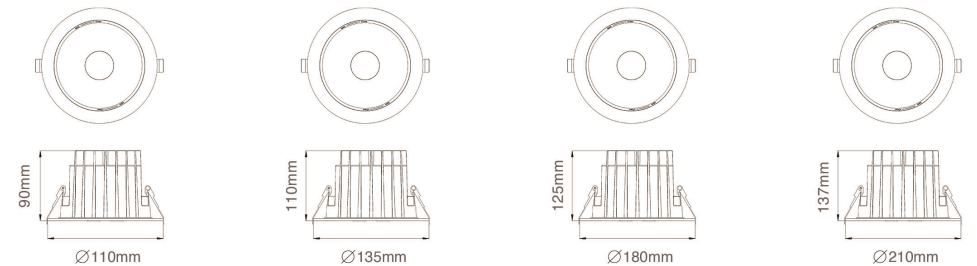



DL30 Downlight

1. Die-casting aluminum housing, excellent heat dissipation
2. External triac-dimmable driver, long lifespan
3. Inside fascia are optional to be silver, black, white, grey
4. 3-CCT switchable, easily to help you to reduce the stock
5. Deep anti glare design, UGR<19
6. Versatile gimbal head with 30 degree tilt
7. IC-4 rated




PRODUCT OVERVIEW

	DL30-01	DL30-02-10	DL30-02-12	DL30-03
Wattage	7W	10W	12W	18W
Beam Angle	15/24/36°	15/24/36°	15/24/36°	15/24/36°
Lumens Efficiency(lm/w)	80lm/w	80lm/w	80lm/w	80lm/w
Lumen(lm)	560lm	800lm	960lm	1440lm
IP Rated	IP20	IP20	IP20	IP20
Materials	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Cut-out	55mm	75mm	75mm	95mm
Size	∅65xH55mm	∅85xH65mm	∅85x75mm	∅110xH85mm




DIMENSIONS

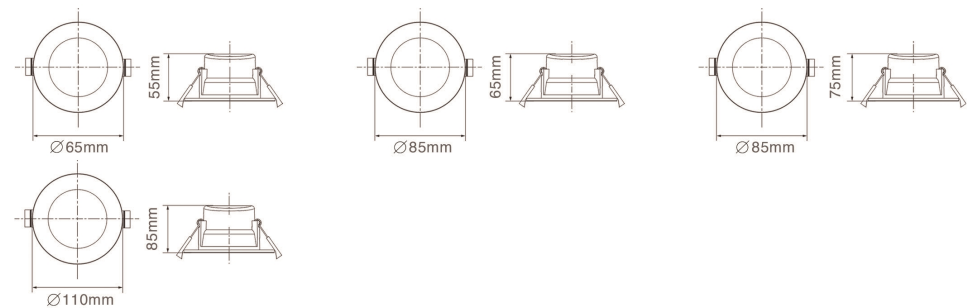



DL31 Downlight

1. Durable die-cast aluminum body profile, with white trim, 80 degree tilt and 330 degree rotation
2. External triac-dimmable driver, long lifespan
3. 4 power selection, 28/32/36/40W
4. High efficiency SMD LED chips, 60 degree reflector system
5. 3-CCT switchable, easily to help you to reduce the stock
6. Deep anti glare design, UGR<19
7. Constant current non-dimmable LED driver with flex and plug




PRODUCT OVERVIEW

DL31-08-40	
Wattage	28W/32W/36W/40W
Beam Angle	60°
Lumens Efficiency(lm/w)	100lm/w
Lumen(lm)	2800lm/ 3200lm/ 3600lm/ 4000lm
IP Rated	IP20
Materials	Die-casting Aluminum
Cut-out	160mm
Size	∅ 230xH195mm




DIMENSIONS

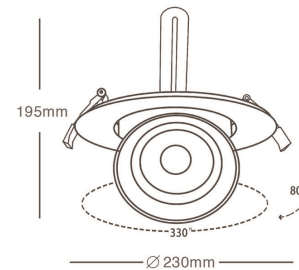



DL32 Downlight

1. Durable die-cast aluminium body profile, with white trim, 80 degree tilt
2. External triac-dimmable driver, long lifespan
3. 4 power selection, 28/32/36/40W
4. High efficiency SMD LED chips, 100 degree reflector system
5. 3-CCT switchable, easily to help you to reduce the stock
6. Constant current non-dimmable LED driver with flex and plug
7. Rectangular design, suitable for some of special requirements




PRODUCT OVERVIEW

	DL32-08-40
Wattage	28W/32W/36W/40W
Beam Angle	60°
Lumens Efficiency(lm/w)	100lm/w
Lumen(lm)	2800lm/ 3200lm/ 3600lm/ 4000lm
IP Rated	IP20
Materials	Die-casting Aluminum
Cut-out	220x140 mm
Size	240x145x100mm



DIMENSIONS

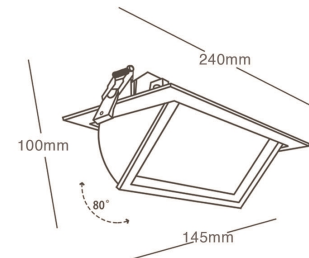




PRODUCT OVERVIEW


	DL37-01	DL37-02	DL37-03	DL37-04
Wattage	3W	7W	9W	15W
Beam Angle	12°/ 24°/ 36°	12°/ 24°/ 36°	12°/ 24°/ 36°	12°/ 24°/ 36°
Lumens Efficiency (lm/w)	85lm/w	85lm/w	85lm/w	85lm/w
Lumen (lm)	255lm	595lm	765lm	1275lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum
Cut-out	55mm	65mm	75mm	95mm
Size	∅65xH32mm	∅80xH37mm	∅90xH45mm	∅105xH50mm

DL37 Downlight

1. Durable die-cast aluminium body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Ajustable tilt up to 30°
6. Polycarbonate optical lens, CRI>80
7. Optional to be dimming and non-dimming
8. CCT switchable on the driver and help you to reduce the stock



DIMENSIONS

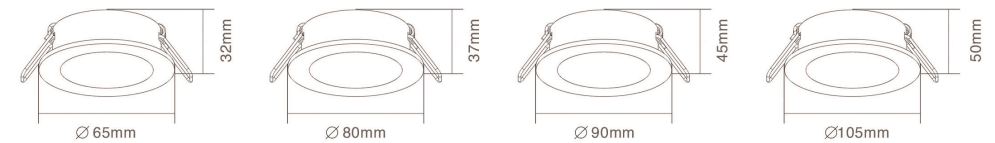




PRODUCT OVERVIEW


	DL38-01	DL38-02	DL38-02.	DL38-03
Wattage	3W/5W	5W/7W	10W/12W	10W/12W
Beam Angle	15° / 24° / 36°	20° / 36° / 60°	20° / 36° / 60°	20° / 36° / 60°
Lumens Efficiency(lm/w)	75lm/w	75lm/w	75lm/w	75lm/w
Lumen(lm)	225lm/375lm	375lm/525lm	750lm/900lm	750lm/900lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum
Cut-out	50mm	72mm	72mm	90-95mm
Size	∅ 56xH66mm	∅ 80xH80mm	∅ 80xH98mm	∅ 102xH120mm

DL38 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Optional to be dimming and non-dimming
7. CCT switchable and help you to reduce the stock



DIMENSIONS

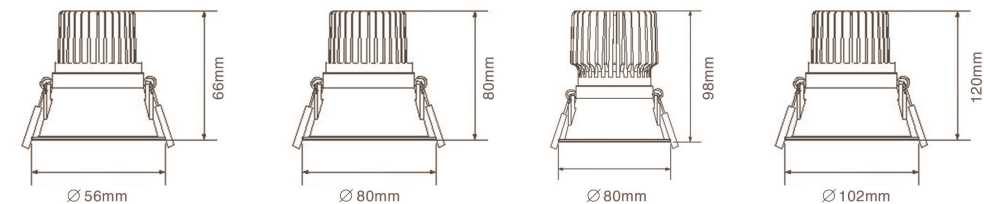




PRODUCT OVERVIEW


	DL39-02	DL39-02.
Wattage	5W/7W	10W/12W
Beam Angle	20°/ 36°/ 60°	20°/ 36°/ 60°
Lumens Efficiency(lm/w)	75lm/w	75lm/w
Lumen(lm)	375lm/525lm	750lm/900lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20
Materials	Aluminum	Aluminum
Cut-out	72-75mm	72-75mm
Size	∅ 82xH78mm	∅ 82xH82mm

DL39 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Optional to be dimming and non-dimming
7. CCT switchable and help you to reduce the stock



DIMENSIONS

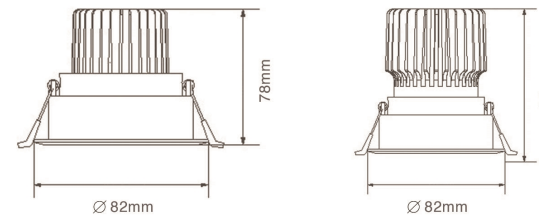




PRODUCT OVERVIEW


	DL43-02	DL43-02.
Wattage	5W/7W	10W/12W
Beam Angle	20°/ 36°/ 60°	20°/ 36°/ 60°
Lumens Efficiency(lm/w)	85lm/w	85lm/w
Lumen(lm)	425lm/595lm	850lm/1020lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20
Materials	Aluminum	Aluminum
Cut-out	72-75mm	72-75mm
Size	82x82xH78mm	82x82xH82mm


DL43 Downlight

1. Durable die-cast aluminum body profile
2. Square bezel combined with a round body to suit a round cut out
3. Stylish white or black powder coat finish
4. High output LED optics
5. Optional to different beam angle,
6. Polycarbonate optical lens, CRI>80
7. Optional to be dimming and non-dimming
8. CCT switchable and help you to reduce the stock




DIMENSIONS

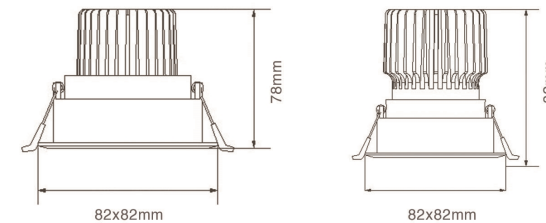

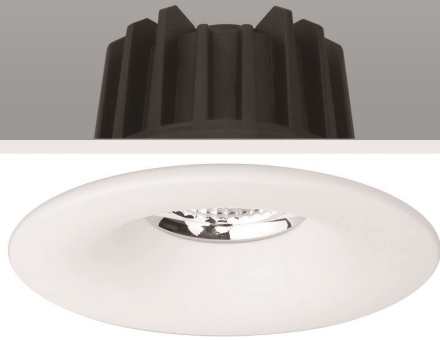

DL44 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Polycarbonate optical lens, CRI>80
5. Optional to be dimming and non-dimming
6. CCT switchable on the driver and help you to reduce the stock




PRODUCT OVERVIEW

	DL44-03	DL44-04	DL44-06	DL44-07	DL44-08
Wattage	10W	15/20W	25/30W	35W/40W	35W/40W
Beam Angle	37°	38°	58°	58°	58°
Lumens Efficiency(lm/w)	85lm/w	85lm/w	85lm/w	85lm/w	85lm/w
Lumen(lm)	850lm	1275lm/1700lm	2125lm/2550lm	2975lm/3400lm	2975lm/3400lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cut-out	90-95mm	110-120mm	150-160mm	180-190mm	180-220mm
Size	∅100xH61mm	∅130xH80mm	∅170xH85mm	∅200xH90mm	∅230xH100mm




DIMENSIONS

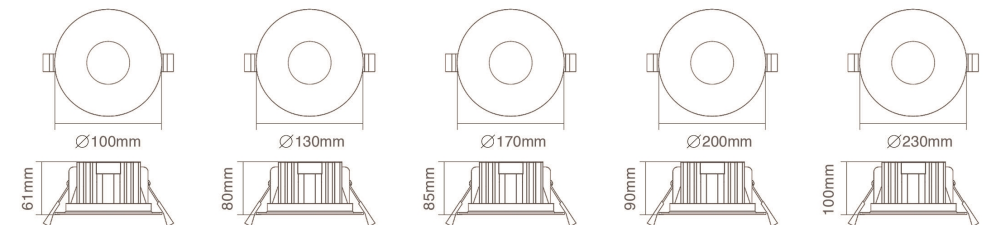



DL45 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Optional to be dimming and non-dimming
7. CCT switchable and help you to reduce the stock




PRODUCT OVERVIEW

	DL45-03
Wattage	10W/12W
Beam Angle	20°/ 36°/ 60°
Lumens Efficiency(lm/w)	85lm/w
Lumen(lm)	850lm/1020lm
Color Temperature	3000K/4000K/5000K
IP Rated	IP20
Materials	Aluminum
Cut-out	90mm
Size	∅100xH75mm



DIMENSIONS

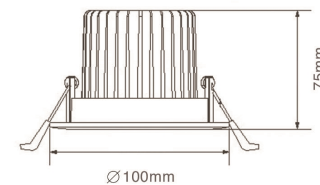




PRODUCT OVERVIEW

DL46-03


Wattage	10W/12W
Beam Angle	20°/ 36°/ 60°
Lumens Efficiency(lm/w)	85lm/w
Lumen(lm)	850lm/1020lm
Color Temperature	3000K/4000K/5000K
IP Rated	IP20
Materials	Aluminum
Cut-out	90mm
Size	100x100xH75mm

DL46 Downlight

1. Durable die-cast aluminum body profile
2. Square bezel combined with a round body to suit a round cut out
3. Stylish white or black powder coat finish
4. High output LED optics
5. Optional to different beam angle,
6. Polycarbonate optical lens, CRI>80
7. Optional to be dimming and non-dimming
8. CCT switchable and help you to reduce the stock



DIMENSIONS

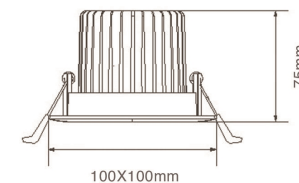




PRODUCT OVERVIEW

DL47-03


Wattage	10W/12W
Beam Angle	20° / 36° / 60°
Lumens Efficiency(lm/w)	75lm/w
Lumen(lm)	750lm/900lm
Color Temperature	3000K/4000K/5000K
IP Rated	IP20
Materials	Aluminum
Cut-out	90mm
Size	∅ 98xH94mm

DL47 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Optional to be dimming and non-dimming
7. CCT switchable and help you to reduce the stock



DIMENSIONS

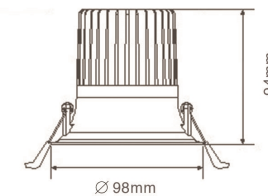




PRODUCT OVERVIEW


	DL48-03
Wattage	10W/12W
Beam Angle	20°/ 36°/ 60°
Lumens Efficiency(lm/w)	75lm/w
Lumen(lm)	750lm/900lm
Color Temperature	3000K/4000K/5000K
IP Rated	IP20
Materials	Aluminum
Cut-out	90mm
Size	∅ 98xH94mm

DL48 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Optional to be dimming and non-dimming
7. CCT switchable and help you to reduce the stock



DIMENSIONS






PRODUCT OVERVIEW


	DL49-02	DL49-02.
Wattage	5W/7W	10W/12W
Beam Angle	20°/ 36°/ 60°	20°/ 36°/ 60°
Lumens Efficiency(lm/w)	75lm/w	75lm/w
Lumen(lm)	375lm/525lm	750lm/900lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20
Materials	Aluminum	Aluminum
Cut-out	72-75mm	72-75mm
Size	82x82xH78mm	82x82xH82mm

DL49 Downlight

1. Durable die-cast aluminum body profile
2. Square bezel combined with a round body to suit a round cut out
3. Stylish white or black powder coat finish
4. High output LED optics
5. Optional to different beam angle,
6. Polycarbonate optical lens, CRI>80
7. Optional to be dimming and non-dimming
8. CCT switchable and help you to reduce the stock



DIMENSIONS

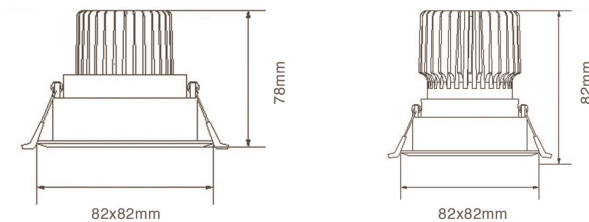




PRODUCT OVERVIEW


	DL50-02	DL50-02.
Wattage	5W/7W	10W/12W
Beam Angle	20°/ 36°/ 60°	20°/ 36°/ 60°
Lumens Efficiency(lm/w)	75lm/w	75lm/w
Lumen(lm)	375lm/525lm	750lm/900lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20
Materials	Aluminum	Aluminum
Cut-out	72-75mm	72-75mm
Size	∅ 82xH78mm	∅ 82xH82mm

DL50 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Optional to be dimming and non-dimming



DIMENSIONS

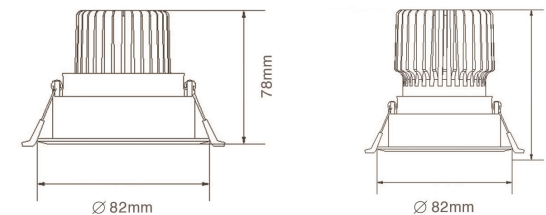





PRODUCT OVERVIEW


	DL51-01	DL51-02	DL51-03	DL51-04	DL51-05
Wattage	5W/7W	7W/10W	15W/18W	20W	30W
Beam Angle	15°/ 30°/ 45°	15°/ 30°/ 45°	15°/ 30°/ 45°	15°/ 30°/ 45°	15°/ 30°/ 45°
Lumens Efficiency(lm/w)	75lm/w	75lm/w	75lm/w	75lm/w	75lm/w
Lumen(lm)	375lm/525lm	525lm/750lm	1125lm/1350lm	1500lm	2250lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cut-out	55mm	72mm	93mm	120mm	140mm
Size	∅ 64.5xH50mm	∅ 84.5xH70mm	∅ 105xH90mm	∅ 132xH115mm	∅ 149xH122mm

DL51 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Deep recessed design, UGR<19
7. Optional to be dimming and non-dimming
8. CCT switchable on the driver and help you to reduce the stock

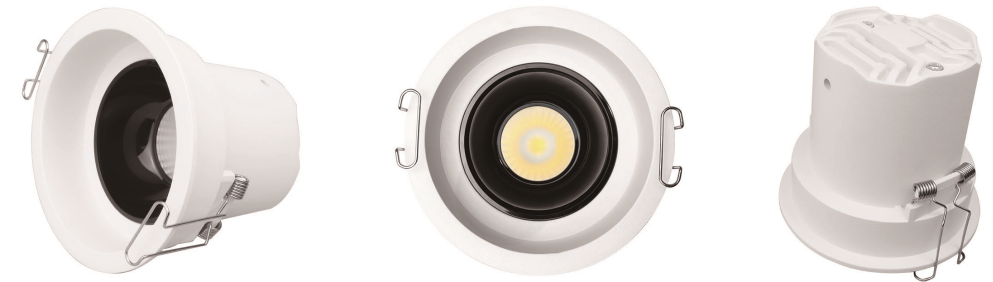


DIMENSIONS

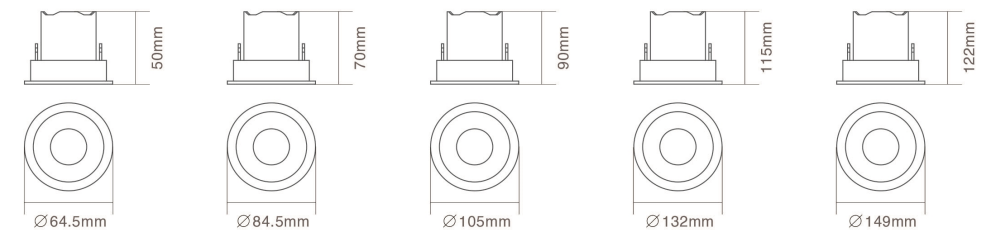




DL52 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Deep recessed design, UGR<19
7. Optional to be dimming and non-dimming
8. CCT switchable on the driver and help you to reduce the stock




PRODUCT OVERVIEW

	DL52-01	DL52-02	DL52-03
Wattage	5W	7W	12W
Beam Angle	15°/ 24°/ 36°	15°/ 24°/ 36°	15°/ 24°/ 36°
Lumens Efficiency(lm/w)	75lm/w	75lm/w	75lm/w
Lumen(lm)	375lm	525lm	900lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum
Cut-out	55mm	75mm	93mm
Size	∅ 65xH58mm	∅ 85xH74mm	∅ 105xH88mm

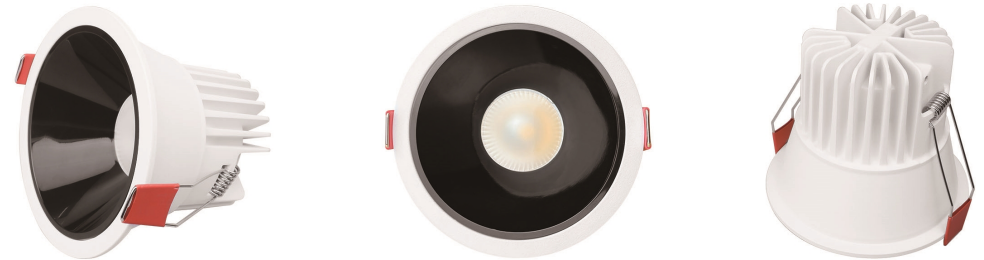


DIMENSIONS

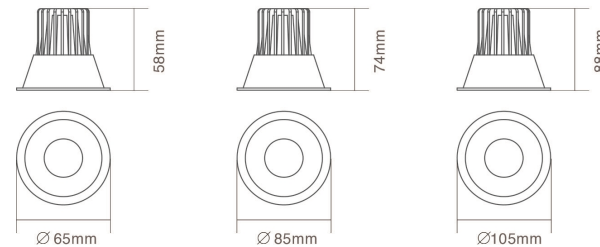



DL53 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Optional to be dimming and non-dimming
7. CCT switchable on the driver and help you to reduce the stock




PRODUCT OVERVIEW

	DL53-02	DL53-03	DL53-04	DL53-06
Wattage	10W	15W/20W	25W/30W	35W/40W
Beam Angle	15°/ 30°/ 45°	15°/ 30°/ 45°	15°/ 30°/ 45°	15°/ 30°/ 45°
Lumens Efficiency(lm/w)	85lm/w	85lm/w	85lm/w	85lm/w
Lumen(lm)	850lm	1275lm/1700lm	2125lm/2550lm	2975lm/3400lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum
Cut-out	70mm	92mm	120mm	145mm
Size	∅90xH78mm	∅108xH100mm	∅138xH109mm	∅160xH125mm




DIMENSIONS

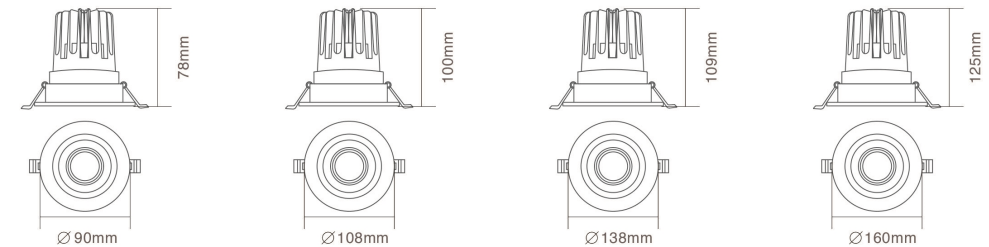




DL54 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Optional to be dimming and non-dimming
7. CCT switchable on the driver and help you to reduce the stock




PRODUCT OVERVIEW

	DL54-01	DL54-02	DL54-03	DL54-04	DL54-05
Wattage	5W	10W	15W/20W	25W/30W	35W/40W
Beam Angle	24°	24°	24°	24°	24°
Lumens Efficiency(lm/w)	85lm/w	85lm/w	85lm/w	85lm/w	85lm/w
Lumen(lm)	425lm	850lm	1275lm/1700lm	2125lm/2550lm	2975lm/3400lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cut-out	55mm	70mm	92mm	120mm	145mm
Size	∅68xH65mm	∅90xH77mm	∅108xH87mm	∅138xH92mm	∅160xH110mm

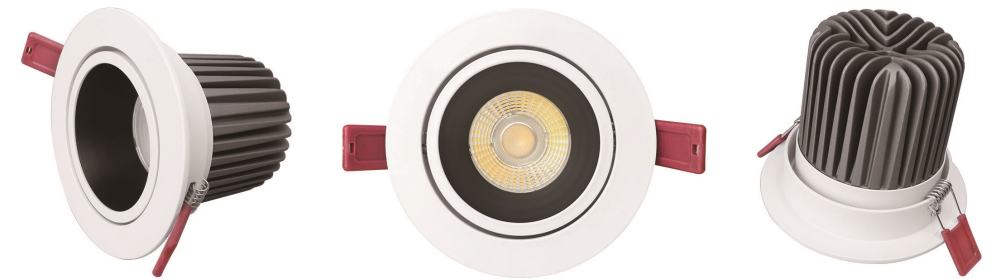


DIMENSIONS

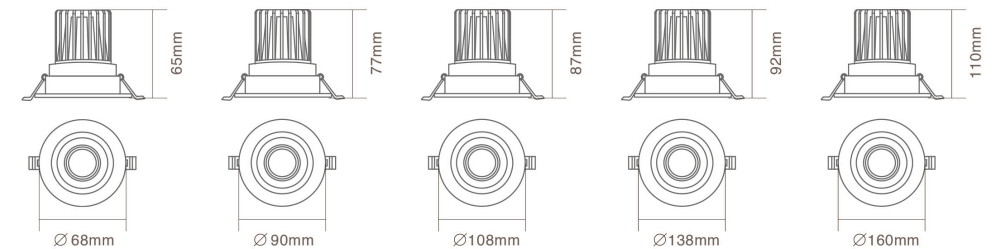



DL55 Downlight

1. Durable die-cast aluminum body profile
2. Stylish white or black powder coat finish
3. High output LED optics
4. Optional to different beam angle,
5. Polycarbonate optical lens, CRI>80
6. Optional to SMD and COB
7. Optional to be dimming and non-dimming
8. CCT switchable on the driver and help you to reduce the stock




PRODUCT OVERVIEW

	DL55-02	DL55-03	DL55-04	DL55-05	DL55-06	DL55-08
Wattage	7W	10W	15W	20W	30W	40W
Beam Angle	100°	100°	100°	100°	100°	100°
Lumens Efficiency(lm/w)	95lm/w	95lm/w	95lm/w	95lm/w	95lm/w	95lm/w
Lumen(lm)	665lm	950lm	1425lm	1900lm	2850lm	3800lm
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
IP Rated	IP20	IP20	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cut-out	70-80mm	90-95mm	100-110mm	140-150mm	170-180mm	200-210mm
Size	∅90xH50mm	∅105xH53mm	∅120xH62mm	∅160xH73mm	∅190xH82mm	∅220xH95mm




DIMENSIONS

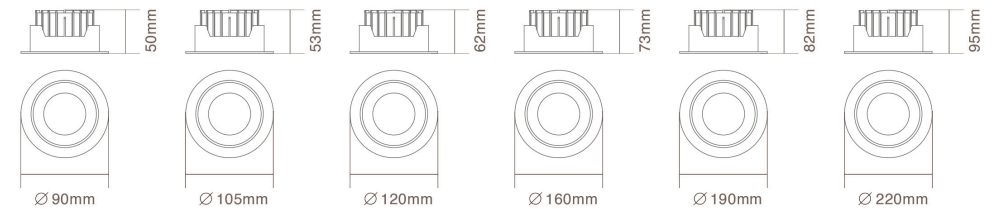

Linear Downlight



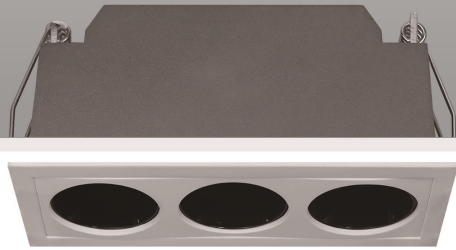


PRODUCT OVERVIEW


	LD01-01	LD01-02
Wattage	3x3W	6x3W
Beam Angle	8° / 12° / 15° / 25° / 30° / 45°	8° / 12° / 15° / 25° / 30° / 45°
Lumens Efficiency(lm/w)	50lm/w	50lm/w
Lumen(lm)	450lm	900lm
Color Temperature	3000-6500K	3000-6500K
IP Rated	IP20	IP20
Materials	Aluminum	Aluminum
Cut-out	L108xW40mm	L215xW40mm
Size	L118xW50mm	L225xW50mm

LD01 Linear Downlight

1. External driver, optional to be dimmable and non-dimmable
2. Supplied with Flex & Plug
3. Anti-glare louvre reflector design, UGR<19
4. Available in 8°, 12°, 15°, 25°, 30° and 45° beam angle options
5. Durable die-cast aluminum body profile
6. With its clean, straight lines and recessed design, this downlight creates a minimalistic look that adds a touch of sophistication to any space.



DIMENSIONS

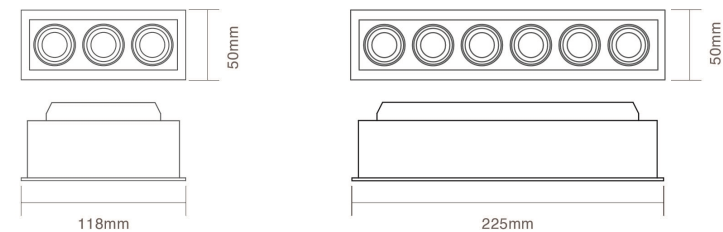




PRODUCT OVERVIEW


	LD02-01	LD02-02
Wattage	3x3W	6x3W
Beam Angle	8° / 12° / 15° / 25° / 30° / 45°	8° / 12° / 15° / 25° / 30° / 45°
Lumens Efficiency(lm/w)	50lm/w	50lm/w
Lumen(lm)	450lm	900lm
Color Temperature	3000-6500K	3000-6500K
IP Rated	IP20	IP20
Materials	Aluminum	Aluminum
Cut-out	L120xW45mm	L225xW45mm
Size	L180xW45xH65mm	L295xW45xH65mm

LD02 Linear Downlight

1. External driver, optional to be dimmable and non-dimmable
2. Supplied with Flex & Plug
3. Anti-glare louvre reflector design, UGR<19
4. Available in 8°, 12°, 15°, 25°, 30° and 45° beam angle options
5. Durable die-cast aluminium body profile
6. Mounting elements should be embedded in the ceiling before installing the lamps
7. The borderless design allows for a clean and seamless look that complements any decor style.



DIMENSIONS

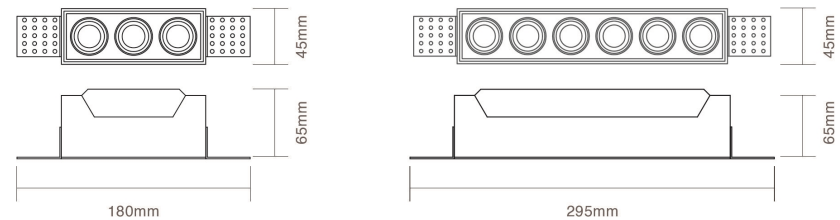




PRODUCT OVERVIEW


	LD03-01	LD03-02
Wattage	3x3W	6x3W
Beam Angle	8° / 12° / 15° / 25° / 30° / 45°	8° / 12° / 15° / 25° / 30° / 45°
Lumens Efficiency(lm/w)	50lm/w	50lm/w
Lumen(lm)	450lm	900lm
Color Temperature	3000-6500K	3000-6500K
IP Rated	IP20	IP20
Materials	Aluminum	Aluminum
Cut-out	L120xW63mm	L226xW63mm
Size	L126xW72xH55mm	L232xW72xH55mm

LD03 Linear Downlight

1. External driver, optional to be dimmable and non-dimmable
2. Supplied with Flex & Plug
3. Anti-glare louvre reflector design, UGR<19
4. Available in 8°, 12°, 15°, 25°, 30° and 45° beam angle options
5. Durable die-cast aluminum body profile
6. Gimbal models have a 32° tilt for directional lighting control.
7. With its clean, straight lines and recessed design, this downlight creates a minimalistic look that adds a touch of sophistication to any space.



DIMENSIONS

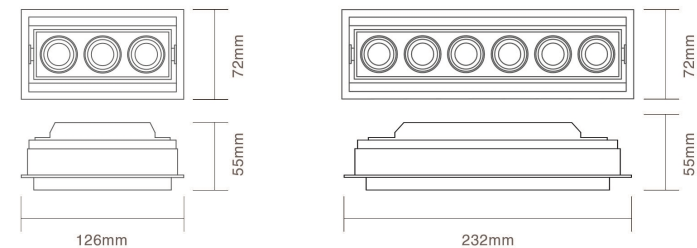




PRODUCT OVERVIEW


	LD04-01	LD04-02
Wattage	3x2W	6x2W
Beam Angle	8° / 12° / 15° / 25° / 30° / 45°	8° / 12° / 15° / 25° / 30° / 45°
Lumens Efficiency(lm/w)	50lm/w	50lm/w
Lumen(lm)	300lm	600lm
Color Temperature	3000-6500K	3000-6500K
IP Rated	IP20	IP20
Materials	Aluminum	Aluminum
Cut-out	L108xW40mm	L215xW40mm
Size	L185xW50mm	L225xW50mm


LD04 Linear Downlight

1. External driver, optional to be dimmable and non-dimmable
2. Supplied with Flex & Plug
3. Anti-glare louvre reflector design, UGR<19
4. Available in 8°, 12°, 15°, 25°, 30° and 45° beam angle options
5. Durable die-cast aluminum body profile
6. Gimbal models have a 32° tilt for directional lighting control.
7. With its clean, straight lines and recessed design, this downlight creates a minimalistic look that adds a touch of sophistication to any space.



DIMENSIONS

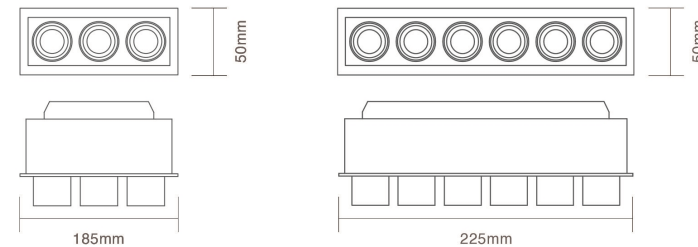

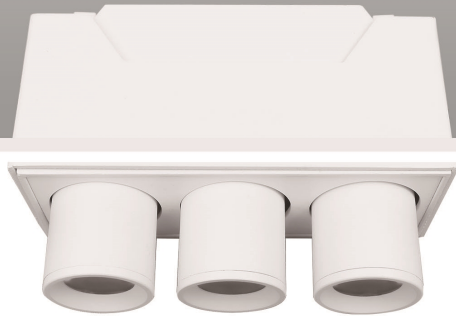


PRODUCT OVERVIEW


	LD05-01	LD05-02
Wattage	3x3W	6x3W
Beam Angle	8° / 12° / 15° / 25° / 30° / 45°	8° / 12° / 15° / 25° / 30° / 45°
Lumens Efficiency(lm/w)	50lm/w	50lm/w
Lumen(lm)	450lm	900lm
Color Temperature	3000-6500K	3000-6500K
IP Rated	IP20	IP20
Materials	Aluminum	Aluminum
Cut-out	L120xW45mm	L225xW45mm
Size	L180xW45xH65mm	L295xW45xH65mm


LD05 Linear Downlight

1. External driver, optional to be dimmable and non-dimmable
2. Supplied with Flex & Plug
3. Anti-glare louvre reflector design, UGR<19
4. Available in 8°, 12°, 15°, 25°, 30° and 45° beam angle options
5. Durable die-cast aluminum body profile
6. Gimbal models have a 32° tilt for directional lighting control.
7. Mounting elements should be embedded in the ceiling before installing the lamps
8. The borderless design allows for a clean and seamless look that complements any decor style.



DIMENSIONS

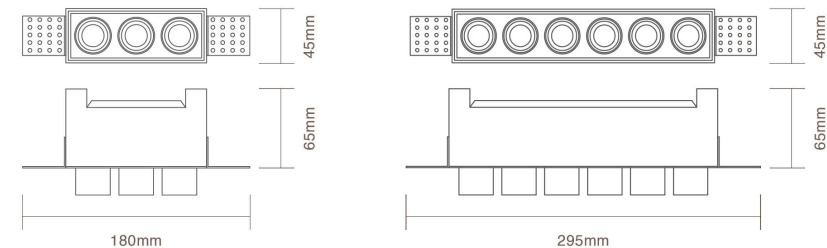





PRODUCT OVERVIEW


	LD06-01	LD06-01	LD06-01	LD06-01	LD06-01
Wattage	2W	2x2W	5x2W	10x2W	15x2W
Beam Angle	15° / 24° / 38°	15° / 24° / 38°	15° / 24° / 38°	15° / 24° / 38°	15° / 24° / 38°
Lumens Efficiency(lm/w)	50lm/w	50lm/w	50lm/w	50lm/w	50lm/w
Lumen(lm)	100lm	200lm	500lm	1000lm	1500lm
Color Temperature	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K
IP Rated	IP20	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cut-out	L37xW37mm	L67xW37mm	L139xW37mm	L272xW37mm	L403xW37mm
Size	L45 xW45xH50mm	L75 xW45xH50mm	L147xW45xH50mm	L279xW45xH50mm	L411xW45xH50mm

LD06 Linear Downlight

1. External driver, optional to be dimmable and non-dimmable
2. Supplied with Flex & Plug
3. Anti-glare louvre reflector design, UGR<19
4. Available in 15°, 24° and 38° beam angle options
5. Durable die-cast aluminum body profile
6. With its clean, straight lines and recessed design, this downlight creates a minimalistic look that adds a touch of sophistication to any space.

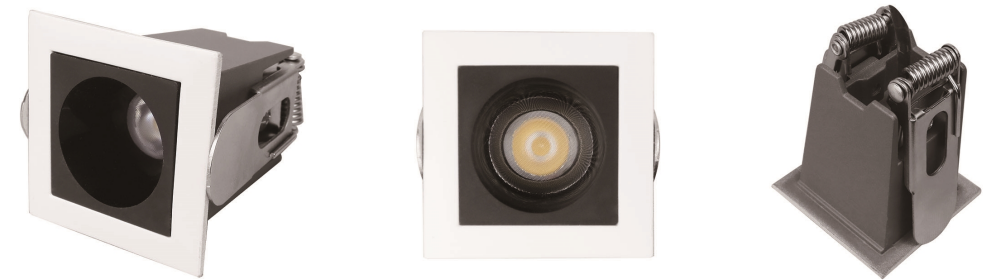

DIMENSIONS

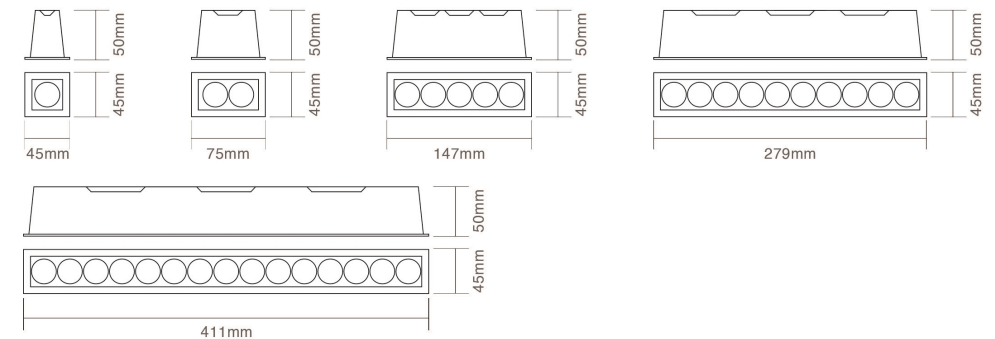




Track Light



TL02 Track Light

1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
2. White or black powder coated finish
3. High output LED optics, CCT 3000K, 4000K, 5000K
4. Available in 15°, 24° and 36° beam angle options
5. Integral constant current non-dimmable driver







PRODUCT OVERVIEW

	TL02-01	TL02-02	TL02-03	TL02-04
Wattage	15W/18W	20W/25W	25W/30W	30W/35W
Beam Angle	15° / 24° / 36°	15° / 24° / 36°	15° / 24° / 36°	15° / 24° / 36°
Lumens Efficiency(lm/w)	90lm/w	90lm/w	90lm/w	90lm/w
Lumen(lm)	1350lm/1620lm	1800lm/2250lm	2250lm/2700lm	2700lm/3150lm
Color Temperature	3CCT	3CCT	3CCT	3CCT
Optics	Lens	Lens	Lens	Lens
IP Rated	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum
Size	∅ 55xH138mm	∅ 65xH143mm	∅ 75xH157mm	∅ 85xH167mm




DIMENSIONS





TL03 Track Light

1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical tilt
2. White or black powder coated finish
3. High output LED optics, CCT 3000K, 4000K, 5000K
4. Available in 15°, 24°, 36° and 50° beam angle options
5. Integral constant current non-dimmable driver




PRODUCT OVERVIEW

	TL03-01	TL03-02	TL03-03	TL03-04
Wattage	15W/18W	20W/25W	25W/30W	30W/35W
Beam Angle	15° / 24° / 36° / 50°	15° / 24° / 36° / 50°	15° / 24° / 36° / 50°	15° / 24° / 36° / 50°
Lumens Efficiency(lm/w)	85lm/w	85lm/w	85lm/w	85lm/w
Lumen(lm)	1275lm/1530lm	1700lm/2125lm	2125lm/2550lm	2550lm/2975lm
Color Temperature	3CCT	3CCT	3CCT	3CCT
Optics	Reflector	Reflector	Reflector	Reflector
IP Rated	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum
Size	∅55xH138mm	∅65xH143mm	∅75xH157mm	∅85xH167mm




DIMENSIONS

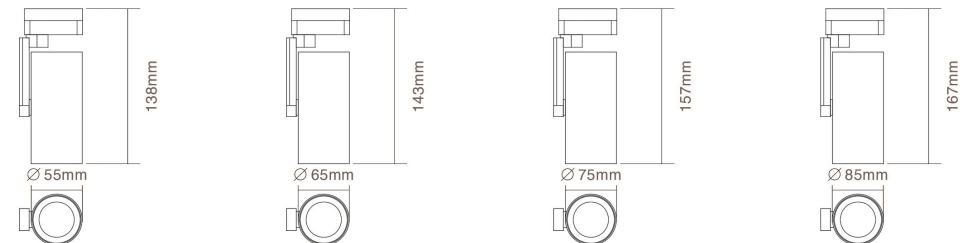



TL04 Track Light

1. Die-casting aluminum profile, horizontal 350 degree rotation, 90 degree vertical adjustment
2. White or black powder coated finish
3. Opal polycarbonate diffuser
4. High output LED optics,
5. Adjustable beam distribution 15 - 55 degree
6. Optional to be triac dimming, 0-10V dimming and non-dimming




PRODUCT OVERVIEW

	TL04-01	TL04-02	TL04-03	TL04-04	TL04-05	TL04-06
Wattage	5W	8W	12W	18W	25W	30W
Beam Angle	15°-55°	15°-55°	15°-55°	15°-55°	15°-55°	15°-55°
Lumens Efficiency(lm/w)	85lm/w	85lm/w	85lm/w	85lm/w	85lm/w	85lm/w
Lumen(lm)	425lm	680lm	1020lm	1530lm	2125lm	2550lm
Color Temperature	3000K-6500K	3000K-6500K	3000K-6500K	3000K-6500K	3000K-6500K	3000K-6500K
Optics	Lens	Lens	Lens	Lens	Lens	Lens
IP Rated	IP20	IP20	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Size	∅35xH80mm	∅45xH100mm	∅55xH115mm	∅65xH135mm	∅75xH150mm	∅85xH165mm




DIMENSIONS

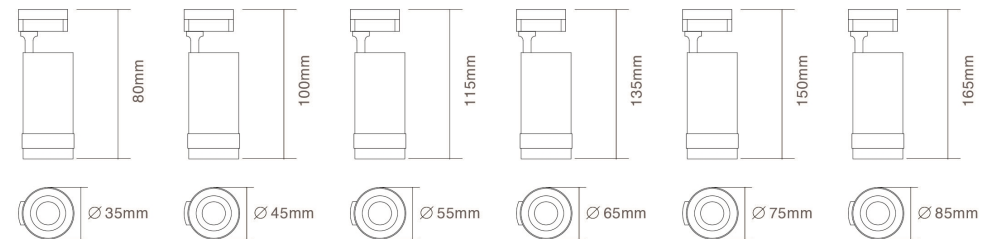



TL05 Track Light

1. Die-casting aluminum profile, horizontal 350 degree rotation , 90 degree vertical adjustment
2. White or black powder coated finish
3. Opal polycarbonate diffuser
4. High output LED optics
5. Available in 15°, 24°, 36° beam angle options
6. Integral constant current non-dimmable driver




PRODUCT OVERVIEW

	TL05-01	TL05-02	TL05-03
Wattage	18W	24W	28W
Beam Angle	15°/ 24°/ 36°	15°/ 24°/ 36°	15°/ 24°/ 36°
Lumens Efficiency(lm/w)	85lm/w	85lm/w	85lm/w
Lumen(lm)	1530lm	2040lm	2380lm
Color Temperature	3000K-6500K	3000K-6500K	3000K-6500K
Optics	Lens	Lens	Lens
IP Rated	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum
Size	∅60xH170mm	∅70xH170mm	∅80xH170mm



DIMENSIONS

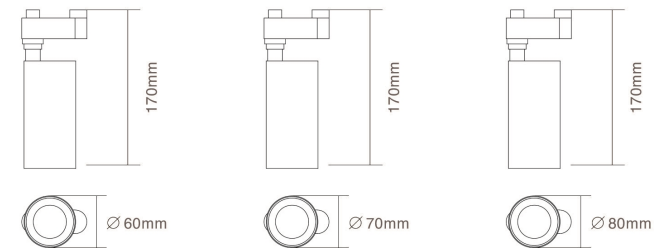




Surface Mounted Downlight



SDL01 Surface Mounted Downlight

1. Die cast aluminum body profile, concealed mounting screws and matt white powder coat finish, optional black finish to order
2. Deep recessed angle fitting provides excellent glare control and light distribution
3. High output LED optics, with a changeable multi-faceted reflector system
4. Optional to be dimmable and non-dimmable
5. Available in 24° and 36° beam angle options




PRODUCT OVERVIEW

	SDL01-01	SDL01-02	SDL01-03	SDL01-04	SDL01-05	SDL01-06
Wattage	10W	15W	12W	18W	25W	30W
Beam Angle	24° / 36°	24° / 36°	24° / 36°	24° / 36°	24° / 36°	24° / 36°
Lumens Efficiency(lm/w)	80lm/w	80lm/w	80lm/w	80lm/w	80lm/w	80lm/w
Lumen(lm)	800lm	1200lm	960lm	1440lm	2000lm	2400lm
Color Temperature	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K
Optics	Lens	Lens	Lens	Lens	Lens	Lens
IP Rated	IP20	IP20	IP20	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Size	∅71xH100mm	∅90xH120mm	∅110xH145mm	∅140xH170mm	∅170.5xH190mm	∅200xH210mm




DIMENSIONS

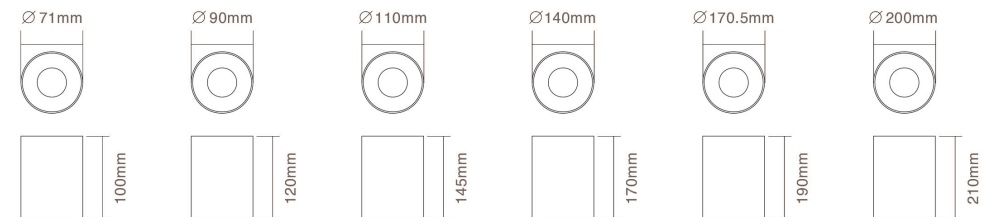



SDL02 Surface Mounted Downlight

1. Die cast aluminum body profile, concealed mounting screws and matt white powder coat finish, optional black finish to order
2. Deep recessed angle fitting provides excellent glare control and light distribution
3. High output LED optics, with a changeable multi-faceted reflector system
4. Optional to be dimmable and non-dimmable
5. Available in 36° and 60° beam angle options
6. IP65 rated providing protection from water projected from a nozzle making it suitable for bathroom zone, balcony etc.



Finish — White Black

PRODUCT OVERVIEW

	SDL02-01	SDL02-02	SDL02-03	SDL02-04	SDL02-05	SDL02-06
Wattage	10W	15W	20W/ 25W	30/ 35W	40/ 50W	50/ 60W
Beam Angle	36° / 60°	36° / 60°	36° / 60°	36° / 60°	36° / 60°	36° / 60°
Lumens Efficiency(lm/w)	80lm/w	80lm/w	80lm/w	80lm/w	80lm/w	80lm/w
Lumen(lm)	800lm	1200lm	1600lm/2000lm	2400lm/2800lm	3200lm/4000lm	4000lm/4800lm
Color Temperature	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K
Optics	Lens	Lens	Lens	Lens	Lens	Lens
IP Rated	IP65	IP65	IP65	IP65	IP65	IP65
Materials	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Size	∅71xH100mm	∅90xH120mm	∅110xH145mm	∅140xH170mm	∅170.5xH190mm	∅200xH210mm



DIMENSIONS

