



2023

Residential Light

XIAMEN SIMONS LIGHTING CO.,LTD

ADD:

NO.3 ZHONG WANG ROAD, XINGLIN, JIMEI DISTRICT, XIAMEN, CHINA

WEB: WWW.SIMONSLED.COM

EMAIL: INFO@SIMONSLED.COM

TEL: +86 17880320846

XIAMEN SIMONS LIGHTING CO.,LTD

Professional Team

Established in 2012, Simons lighting specialized in R&D and production of commercial lighting and related LED Lights.

We have over 6000 square meter standard workshop and laboratory and operates under ISO9001. We have a creative and dynamic team like design, R&D center, purchasing, project management, manufacturing, assembly and quality control.

During the past years, Simons lighting is pride itself in offering quality products to a wide range of customers. In the future, our commitment is to be the first choice of yours, and we hope that our professional will inspire your confident in Simons lighting.

SIMONS LIGHTING

SIMONS





Downlight



PRODUCT OVERVIEW


	DL01-02	DL01-03	DL01-06	DL01-08
Wattage	5W/8W	5W/8W/10W	10W/18W	10W/18W/24W
Beam Angle	100°	100°	100°	100°
Lumen Efficiency(lm/w)	100lm/w	100lm/w	100lm/w	100lm/w
Lumen(lm)	500lm/800lm	500lm/800lm/1000lm	1000lm/1800lm	1000lm/1800lm/2400lm
IP Rated	IP44	IP44	IP44	IP44
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	70-85mm	90~100mm	150~180mm	200~220mm
Size	∅ 95xH65mm	∅ 115xH70mm	∅ 190xH76mm	∅ 230xH82mm

DL01 Downlight

1. Advanced thermal conductive plastic radiator
2. Built-in driver, fit for most of branded dimmers including leading edge dimmer
3. IC-4, IC-F rated
4. Lumen efficiency can up to 100lm/w
5. Tri-colour design ,can reduce your stock
6. Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT



DIMENSIONS

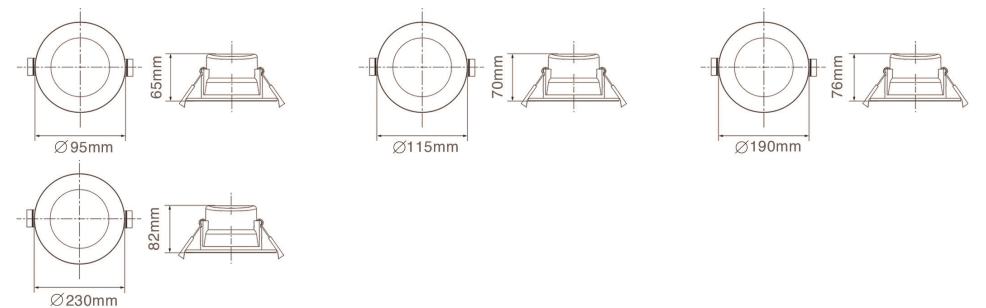



PRODUCT OVERVIEW


	DL01-02-F	DL01-03-F	DL01-04-F	DL01-06-F	DL01-08-F
Wattage	5W/8W	5W/8W/10W	10W/15W	10W/18W	10W/18W/24W
Beam Angle	100°	100°	100°	100°	100°
Lumen Efficiency(lm/w)	100lm/w	100lm/w	100lm/w	100lm/w	100lm/w
Lumen(lm)	500lm/800lm	500lm/800lm/1000lm	1000lm/1500lm	1000lm/1800lm	1000lm/1800lm/2400lm
IP Rated	IP44	IP44	IP44	IP44	IP44
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	70-85mm	90~100mm	110~130mm	150~180mm	200~220mm
Size	∅ 92xH55mm	∅ 115xH60mm	∅ 140xH65mm	∅ 190xH70mm	∅ 230xH95mm

DL01-F Downlight

1. Advanced thermal conductive plastic radiator
2. Built-in driver, fit for most of branded dimmers including leading edge dimmer
3. IC-4 , IC-F rated
4. Lumen efficiency can up to 100lm/w
5. Tri-colour design, can reduce your stock
6. Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




DIMENSIONS

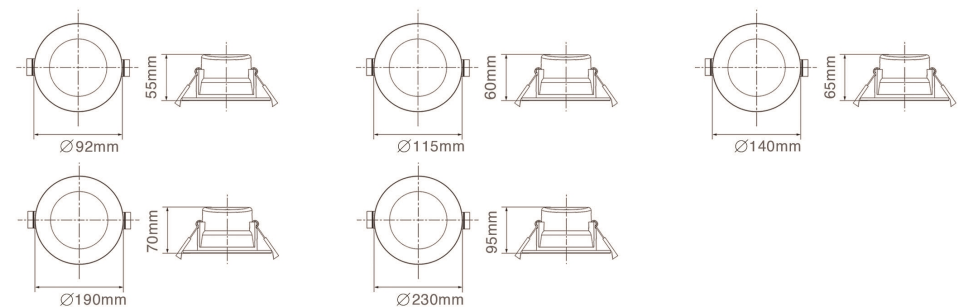



DL01-F-S Downlight

1. Internal driver
2. IC-F rated, V-0 flame rating on the housing
3. Lumen efficiency can up to 100lm/w
4. Tri-colour on the light to help you to reduce the stock qty's
5. Lux switchable: 10lux, 50lux, 100lux, 150lux, disable
6. PIR Motion sensor:
 - Detection Range: 4m
 - Detection Angle: 100 degrees
 - Duration Time: 2 minute, subsequent detection will restart the minutetimer
 - Manual override function: On/off twice then the light will stay on after gone into manual override function, the light will stay on for 8 hours and after 8 hours past the light will go into AUTO mode (normal mode) and also if light set in manual override mode if turn the main power off for 30 seconds will turn off the manual override function. When turn on power again after 30 seconds the light will work as AUTO mode (normal mode)

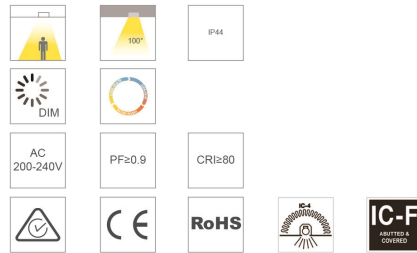


PRODUCT OVERVIEW

	DL01-03-08-F-S	DL01-03-09-F-S
Wattage	8W	9W
Beam Angle	100°	100°
Lumens Efficiency(lm/w)	100lm/w	100lm/w
Lumen(lm)	800lm/s	900lm/s
CCT	3CCT(3000K,4000K,5700K)	3CCT(3000K,4000K,5700K)
LUX	10lux,50lux,100lux,150lux,disable	10lux,50lux,100lux,150lux,disable
IP Rated	IP44	IP44
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	90-100mm
Size	∅108xH74mm	∅108xH74mm



DIMENSIONS

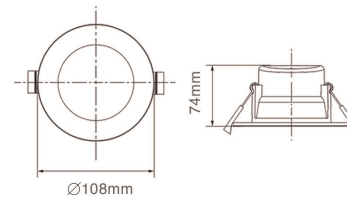



PRODUCT OVERVIEW


	DL02-02-05	DL02-03-05	DL02-03-08
Wattage	5W	5W	8W
Beam Angle	60°	60°	60°
Lumens Efficiency(lm/w)	90lm/w	90lm/w	90lm/w
Lumen(lm)	450lm	450lm	720lm
IP Rated	IP20	IP20	IP20
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	70-80mm	90~98mm	90~98mm
Size	∅ 85xH55mm	∅ 105xH65mm	∅ 105xH65mm


DL02 Downlight

1. Thermal conductive plastic coated aluminum housing, V-0 flame rating
2. 220-240V built-in driver, integrated design
3. IC-4 rated
4. Non dimmable/ Triac dimmable available
5. Gimbal fascia design and can be used on some special area
6. Tri-colour design ,can reduce your stock
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT



DIMENSIONS

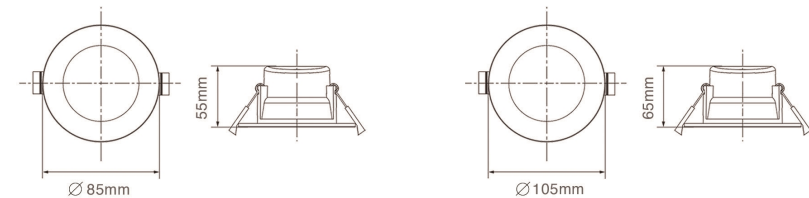

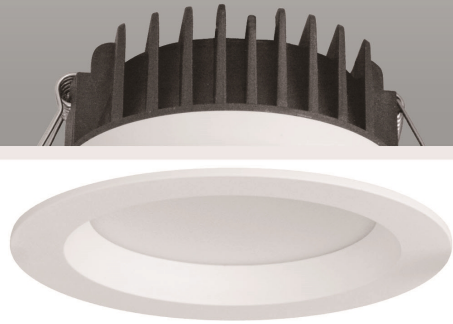


PRODUCT OVERVIEW


	DL03-03-F	DL03-03-R
Wattage	8W/10W/12W	8W/10W/12W
Beam Angle	100°	100°
Lumens Efficiency(lm/w)	100lm/w	100lm/w
Lumen(lm)	800lm/1000lm/1200lm	800lm/1000lm/1200lm
IP Rated	IP54	IP54
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	90-100mm
Size	∅108xH40mm	∅108xH48mm
Fascia	Flat face	Recessed face


DL03 Downlight

1. External driver, fit for most of branded dimmers including leading edge dimmer
2. IC-4 rated, V-0 flame rating on the housing
3. Lumen efficiency can up to 100lm/w
4. Tri-colour on the light to help you to reduce the stock qty's
5. A metal fascia can be assembled on the light, black, silver, satin chrome, nickel are all optional here
6. Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart ccontrol
7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




DIMENSIONS

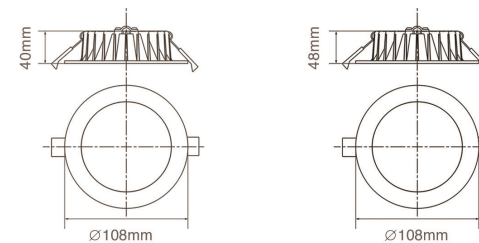

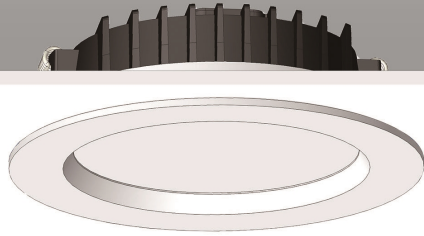


DL57 Downlight

1. Slim design, suitable for some special roof requirement.
2. IC-4 rated, V-0 flame rating on the housing
3. Lumen efficiency can up to 100lm/w
4. Tri-colour on the light to help you to reduce the stock qty
5. A metal fascia can be assembled on the light, black, silver, satin chrome, nickel are all optional here.





PRODUCT OVERVIEW

	DL57-04	DL57-06	DL57-08
Wattage	13W	16W	20W
Beam Angle	100°	100°	100°
Lumens Efficiency(lm/w)	100lm/w	100lm/w	100lm/w
Lumen(lm)	1300lm	1600lm	2000lm
IP Rated	IP44	IP44	IP44
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	120mm	150mm	200mm
Size	∅138×36mm	∅190×36mm	∅230×36mm

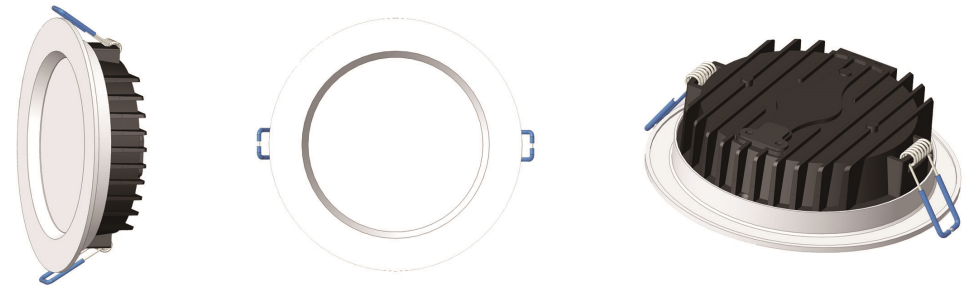


DIMENSIONS

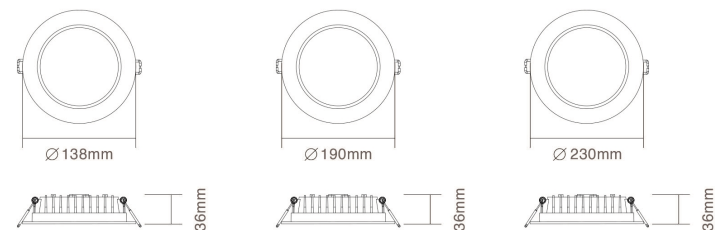

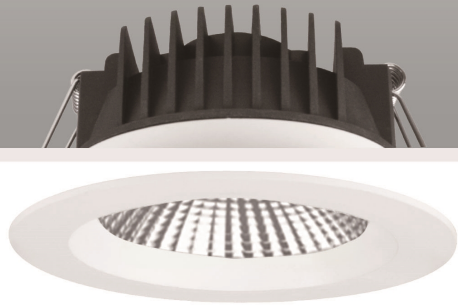

DL40 Downlight

1. External driver, fit for most of branded dimmers including leading edge dimmer
2. IC-4 rated, V-0 flame rating on the housing
3. Lumen efficiency can up to 90lm/w
4. Tri-colour on the light to help you to reduce the stock qty's
5. A metal fascia can be assembled on the light, black, silver, satin chrome, nickel are all optional here
6. Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




PRODUCT OVERVIEW

	DL40-03-8	DL40-03-10
Wattage	8W	10W
Beam Angle	45°	45°
Lumens Efficiency (lm/w)	90lm/w	90lm/w
Lumen (lm)	720lm	900lm
IP Rated	IP54	IP54
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	90-100mm
Size	∅108xH48mm	∅108xH48mm



DIMENSIONS






PRODUCT OVERVIEW


	DL40-03-8-L	DL40-03-9-L	DL40-03-10-L
Wattage	8W	9W	10W
Beam Angle	60°	60°	60°
Lumens Efficiency(lm/w)	90lm/w	90lm/w	90lm/w
Lumen(lm)	720lm	810lm	900lm
IP Rated	IP54	IP54	IP54
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90~98mm	90~98mm	90~98mm
Size	∅ 108 xH48mm	∅ 108 xH48mm	∅ 108 xH48mm


DL40-L Downlight

1. External driver, fit for most of branded dimmers including leading edge dimmer
2. IC-4 rated, V-0 flame rating on the housing
3. Lumen efficiency can up to 90lm/w
4. Tri-colour on the light to help you to reduce the stock qty's
5. A metal fascia can be assembled on the light, black, silver, satin chrome, nickel are all optional here
6. Dimmer Type: Trailing edge, 0-10V, DALI/DSI, Smart control
7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT



DIMENSIONS

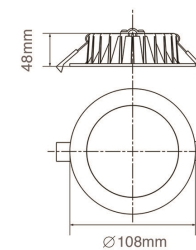

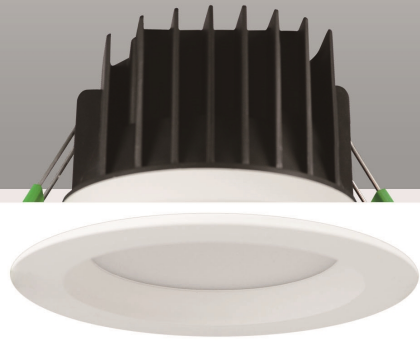


PRODUCT OVERVIEW


	DL41-03	DL41-03-F
Wattage	8W/9W/10W	8W/9W/10W
Beam Angle	100°	100°
Lumens Efficiency(lm/w)	100lm/w	100lm/w
Lumen(lm)	800lm/900lm/1000lm	800lm/900lm/1000lm
IP Rated	IP54	IP54
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	90-100mm
Size	∅108xH65mm	∅108xH57mm
Fascia	Recessed Face	Flat Face

DL41 Downlight

1. Internal driver, fit for most of branded dimmers including leading edge dimmer
2. IC-4 rated, V-0 flame rating on the housing
3. Lumen efficiency can up to 100lm/w
4. Tri-colour on the light to help you to reduce the stock qty's
5. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
6. Optional to install recessed and flat fascia.
7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




DIMENSIONS

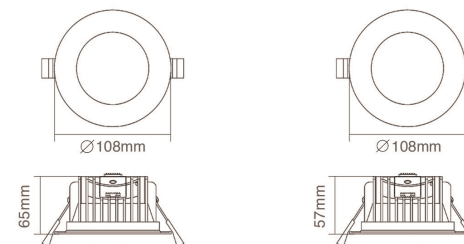

3 CCT ——— CW ——— NW ——— WW

Finish ——— White Black

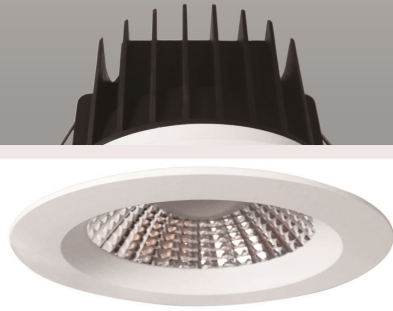


PRODUCT OVERVIEW


	DL41-03-08-R	DL41-03-09-R
Wattage	8W	9W
Beam Angle	45°	45°
Lumens Efficiency(lm/w)	90lm/w	90lm/w
Lumen(lm)	720lm	810lm
IP Rated	IP54	IP54
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	90-100mm
Size	∅108xH65mm	∅108xH65mm

DL41-R Downlight

1. Internal driver, fit for most of branded dimmers including leading edge dimmer
2. IC-4 rated, V-0 flame rating on the housing
3. SMD chip, lumen efficiency can up to 90lm/w
4. Tri-colour on the light to help you to reduce the stock qty
5. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
6. Optional to install recessed and flat fascia.
7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




DIMENSIONS



3CCT ——— CW ——— NW ——— WW

Finish ——— White Black

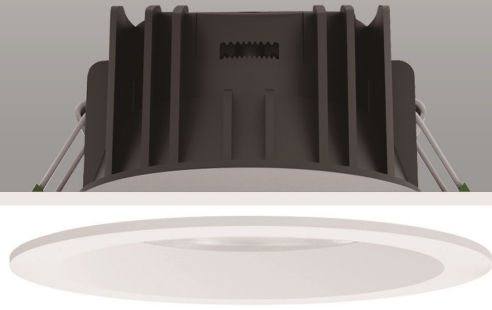


PRODUCT OVERVIEW

	DL41-03-08-L	DL41-03-09-L
Wattage	8W	9W
Beam Angle	60°	60°
Lumens Efficiency(lm/w)	90lm/w	90lm/w
Lumen(lm)	720lm	810lm
IP Rated	IP44	IP44
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Optic	Lens	Lens
Cut-out	90-100mm	90-100mm
Size	∅108xH65mm	∅108xH65mm

DL41-L Downlight

1. External driver, fit for most of branded dimmers including leading edge dimmer
2. IC-4 rated, V-0 flame rating on the housing
3. Lumen efficiency can up to 90lm/w
4. Tri-colour on the light to help you to reduce the stock qty's
5. A metal fascia can be assembled on the light, black, silver, satin chrome, nickel are all optional here
6. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




3CCT ————— CW ————— NW ————— WW

Finish ————— White Black




DIMENSIONS





DL10.2.0 Downlight

1. Integrated design with internal driver, fit for most of branded dimmers except leading edge dimmer
2. IC-4 rated, V-0 flame rating on the housing
3. Deep recessed downlight with lens, beam angle is 60 degree, UGR<19.
4. Tri-colour on the light to help you to reduce the stock qtys
5. The materials of this downlight is plastic+aluminum, high cost effective
6. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
7. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




PRODUCT OVERVIEW

	DL10.2.0-03-08	DL10.2.0-03-09
Wattage	8W	9W
Beam Angle	60°	60°
Lumens Efficiency(lm/w)	90lm/w	90lm/w
Lumen(lm)	720lm	810lm
IP Rated	IP44	IP44
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-95mm	90-95mm
Size	∅100xH87.7mm	∅100xH87.7mm




DIMENSIONS

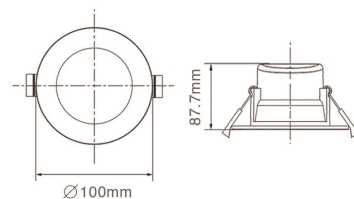



DL13 Downlight

1. Integral dimmable driver, perfect smooth phase dimming to create required lighting level.
2. A versatile design supplied with flex and plug fitted for easy installation
3. High efficiency SMD LED chips
4. CRI > 80, selectable CCT 3000 / 4000 / 5700K, beam distribution 60 degree, UGR<19
5. Polyamide trim and body form in white or black
6. Low glare, suitable for residential and commercial applications minimising direct glare whilst still providing even and effective illumination.
7. IC - 4, IC-F rated




PRODUCT OVERVIEW

	DL13-03-08	DL13-03-09
Wattage	8W	9W
Beam Angle	60°	60°
Lumens Efficiency(lm/w)	90lm/w	90lm/w
Lumen(lm)	720lm	810lm
IP Rated	IP20	IP20
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-95mm	90-95mm
Size	∅100xH87.7mm	∅100xH87.7mm



DIMENSIONS

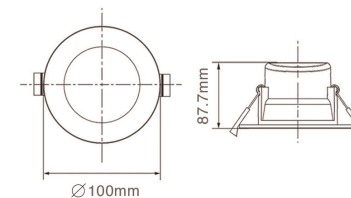



DL11 Downlight

1. Integrated design with internal driver, fit for most of branded dimmers except leading edge dimmer
2. IC-4 rated, V-0 flame rating on the housing
3. Flat surface design integrates well into ceiling
4. Tri-colour on the light to help you to reduce the stock qty's
5. Quick connector inside the light, easy to be connected
6. Opal PC diffuser and plastic covered aluminum housing
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




PRODUCT OVERVIEW

	DL11-03-F	DL11-03-R
Wattage	8W/10W	8W/10W
Beam Angle	100°	100°
Lumens Efficiency(lm/w)	100lm/w	100lm/w
Lumen(lm)	800lm/1000lm	800lm/1000lm
IP Rated	IP44	IP44
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	90-100mm
Size	∅108xH41mm	∅108xH46mm



DIMENSIONS

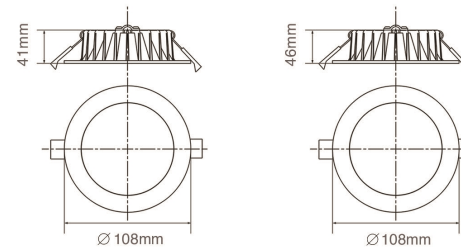



PRODUCT OVERVIEW


	DL12-03-08	DL12-03-10
Wattage	8W	10W
Beam Angle	100°	100°
Lumens Efficiency(lm/w)	100lm/w	100lm/w
Lumen(lm)	800lm	1000lm
IP Rated	IP44	IP44
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-98mm	90-98mm
Size	Ø107x64mm	Ø107x64mm

DL12 Downlight

1. Integrated design with internal driver, fit for most of branded dimmers except leading edge dimmer
2. IC-4 rated, V-0 flame rating on the housing
3. Lumen efficiency can up to 100lm/w
4. Tri-colour on the light to help you to reduce the stock qty's
5. Silver, white and black exchangeable rings
6. The materials of this downlight is plastic+aluminum, high cost effective
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart ccontrol
8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




DIMENSIONS

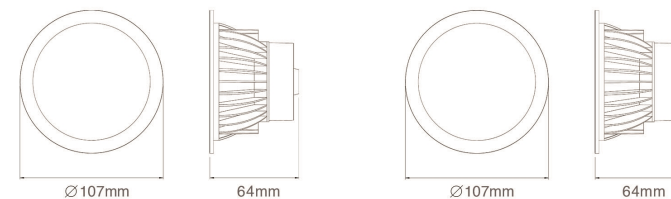



DL07 Downlight

1. Plastic cover aluminum housing, excellent heat dissipation
2. External triac-dimmable driver, long lifespan
3. Inside fascia are optional to be silver, black, white
4. The colour can be customized
5. Deep anti glare design, UGR<19
6. IC-4 rated




PRODUCT OVERVIEW

	DL07-02-05	DL07-03-08	DL07-04-12	DL07-06-18
Wattage	5W	8W	12W	16W
Beam Angle	60°	60°	60°	60°
Lumens Efficiency(lm/w)	90lm/w	90lm/w	90lm/w	90lm/w
Lumen(lm)	450lm	720lm	1080lm	1440lm
IP Rated	IP44	IP44	IP44	IP44
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	73mm	88mm	118mm	155mm
Size	∅92xH68mm	∅110xH69mm	∅140xH78mm	∅182xH75mm




DIMENSIONS

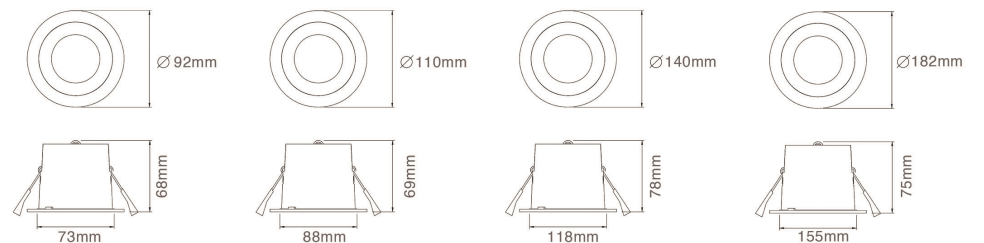



DL56 Downlight

1. External dimmable driver, perfect smooth phase dimming to create required lighting level.
2. A versatile design supplied with flex and plug fitted for easy installation
3. High efficiency SMD LED chips
4. CRI > 80, selectable CCT 3000 / 4000 / 5700K, beam distribution 60 degree, UGR<19
5. Polyamide trim and body form in white or black
6. Low glare, suitable for residential and commercial applications minimising direct glare whilst still providing even and effective illumination.




PRODUCT OVERVIEW

	DL56
Wattage	5W
Beam Angle	60°
Lumens Efficiency(lm/w)	70lm/w
IP Rated	IP40
Materials	Plastic+Aluminum
Cut-out	70mm
Size	Ø 85x45mm




DIMENSIONS





DL33 Downlight

1. Special design with plastic fascia and aluminum middle body, excellent heat dissipation
2. Internal triac-dimmable driver, long lifespan
3. High efficiency SMD LED chips, 50 degree reflector system
5. 4-CCT switchable, easily to help you to reduce the stock
6. Constant current non-dimmable LED driver with flex and plug
7. IP65 on the front face, ideal for all interior uses, including wet areas, such as bathrooms and laundries
8. The facial colour is optional to be white, black and chrome




PRODUCT OVERVIEW

	DL33-02
Wattage	5W/7W
Beam Angle	55°
Lumens Efficiency(lm/w)	90-100lm/w
Lumen(lm)	500-700lm
IP Rated	IP65 on the front face
Materials	Plastic+Aluminum
Cut-out	70mm
Size	∅85xH55mm




DIMENSIONS

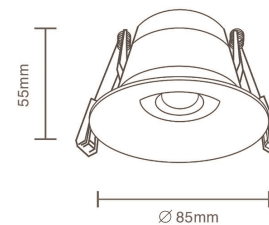



DL04 Downlight

1. Die-casting aluminum material, excellent heat-dissipation
2. IC-4 rated
3. Lumen efficiency can up to 100lm/w
4. Tri-colour optional to reduce stock
5. Super slim design, suitable for many low roof
6. Excellent dimming performance, fit for most of brand dimmers including leading edge dimmer.
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT





PRODUCT OVERVIEW

	DL04-03-10	DL04-03-12
Wattage	10W	12W
Beam Angle	100°	100°
Lumens Efficiency(lm/w)	90lm/w	90lm/w
Lumen(lm)	900lm	1080lm
IP Rated	IP44	IP44
Materials	Die-cast Aluminum	Die-cast Aluminum
Cut-out	90-105mm	90-105mm
Size	∅114xH30mm	∅114xH30mm




DIMENSIONS

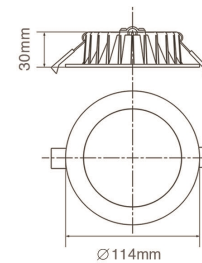

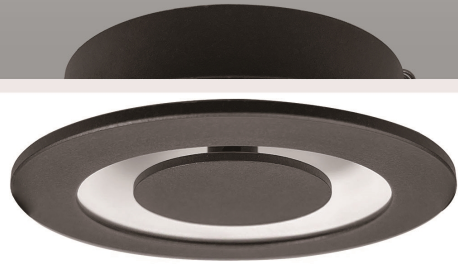

DL35 Downlight

1. New Decoration Downlight, with reflective design
2. External triac-dimmable driver, long lifespan.
3. Optional to different housing colour
4. Different colour on the fascia, shading accessories and reflector, bring you different version of the light.




PRODUCT OVERVIEW

	DL35-01	DL35-02	DL35-03
Wattage	3W	5W	7W
Beam Angle	60°	60°	60°
Lumens Efficiency(lm/w)	70lm/w	70lm/w	70lm/w
Lumen(lm)	210lm	350lm	490lm
IP Rated	IP20	IP20	IP20
Materials	Aluminum	Aluminum	Aluminum
Cut-out	60mm	70mm	80mm
Size	∅70xH24.5mm	∅80xH31mm	∅100xH34mm



DIMENSIONS

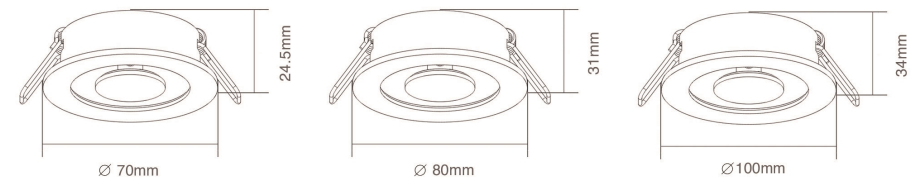


Finish — White Black



DL36 Downlight

1. Slim design, suitable for some special roof requirement.
2. Durable die-cast aluminum body profile, excellent heat-dissipation
3. Optional to different beam angel, meet different customer's different requirements
4. External triac-dimmable driver, long lifespan.
5. Gimbal fascia design




PRODUCT OVERVIEW

	DL36
Wattage	10W
Beam Angle	10°/ 20°/ 30°
Lumens Efficiency(lm/w)	80lm/w
Lumen(lm)	800lm
IP Rated	IP20
Materials	Aluminum
Cut-out	85mm
Size	∅95x37mm



DIMENSIONS

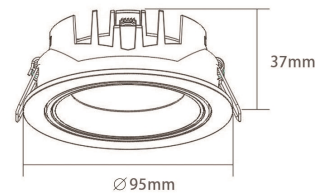




Ceiling Light



CL03 Ceiling Light

1. Easy selectable colour temperature with the integral DIP switch
2. Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
3. High efficiency SMD LED chips, CRI > 80
4. Double insulation
5. Optional to be dimmable and non-dimmable
6. PA10 terminal on the light, easy for installation




PRODUCT OVERVIEW

	CL03-01	CL03-02
Wattage	24W	32W
Beam Angle	110°	110°
Lumens Efficiency(lm/w)	80lm/w	80lm/w
Lumen(lm)	1920lm	2560lm
Color Temperature	3CCT	3CCT
IP Rated	IP40	IP40
Materials	PC	PC
Size	Ø 280xH52mm	Ø 330xH52mm




DIMENSIONS

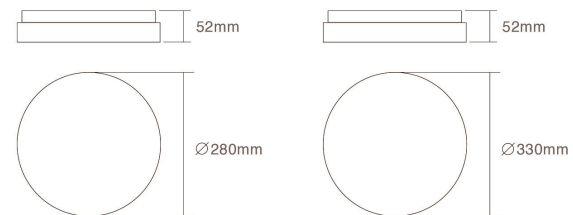



CL04 Ceiling Light

1. Easy selectable colour temperature with the integral DIP switch
2. Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
3. High efficiency SMD LED chips, CRI > 80
4. Double insulation
5. Optional to be dimmable and non-dimmable
6. PA10 terminal on the light, easy for installation
7. Power switchable, easily to help you to reduce the stock
8. Super slim design, only 20mm height




PRODUCT OVERVIEW

	CL04-01	CL04-02	CL04-02
Wattage	18W	24W	32W
Beam Angle	110°	110°	110°
Lumens Efficiency(lm/w)	80lm/w	80lm/w	80lm/w
Lumen(lm)	1440lm	1920lm	2560lm
Color Temperature	3CCT	3CCT	3CCT
IP Rated	IP20	IP20	IP20
Materials	PC	PC	PC
Size	Ø 230xH25mm	Ø 300xH25mm	Ø 400xH25m




DIMENSIONS

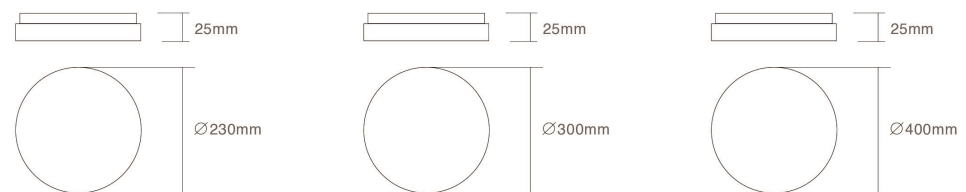



CL05 Ceiling Light

1. Easy selectable colour temperature with the integral DIP switch
2. Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
3. High efficiency SMD LED chips, CRI > 80
4. Double insulation
5. Optional to be dimmable and non-dimmable
6. PA10 terminal on the light, easy for installation
7. IP54 rated, application to balcony, corridor etc




PRODUCT OVERVIEW

	CL05-01	CL05-02
Wattage	12W	18W
Beam Angle	110°	110°
Lumens Efficiency(lm/w)	80lm/w	80lm/w
Lumen(lm)	960lm	1440lm
Color Temperature	3CCT	3CCT
IP Rated	IP54	IP54
Materials	polycarbonate	polycarbonate
Size	∅ 230xH55mm	∅300x H55mm




DIMENSIONS

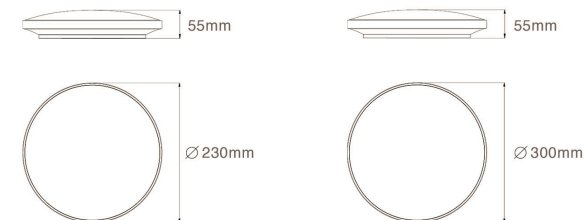



CL07 Ceiling Light

1. Easy selectable colour temperature with the integral DIP switch
2. Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
3. High efficiency SMD LED chips, CRI > 80
4. Double insulation
5. Optional to be dimmable and non-dimmable




PRODUCT OVERVIEW

	CL07
Wattage	18W
Beam Angle	110°
Lumens Efficiency(lm/w)	80lm/w
Lumen(lm)	1440lm
CCT	3000K/4000K/5700K switchable
IP Rated	IP40
Materials	polycarbonate
Size	∅300xH57mm



DIMENSIONS



Batten Light






PRODUCT OVERVIEW


	BL01-0.6-10/15/20-3CCT	BL01-1.2-10/20/40-3CCT	BL01-1.5-30/40/60-3CCT
Wattage	10/15/20W Switchable	10/20/40W Switchable	30/40/60W Switchable
Beam Angle	120°	120°	120°
Lumens Efficiency(lm/w)	100lm/w	100lm/w	100lm/w
Lumen(lm)	2000lm(Max)	4000lm(Max)	6000lm(Max)
IP Rated	IP20	IP20	IP20
CCT	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable
Materials	Steel (base), PC (diffuser)	Steel (base), PC (diffuser)	Steel (base), PC (diffuser)
Length	600mm	1200mm	1500mm
Size	W70xH70mm	W70xH70mm	W70xH70mm

BL01 Batten Light

1. Quality white powdercoated finish with robust polycarbonate diffuser
2. Large 16mm 2 terminal block, easy installation with central cable entry
3. High efficiency SMD LED chips, CRI > 80, 120 degree beam distribution
4. Sliders at both ends open, easy maintainece
5. Integral constant current non-dimmable LED driver
6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
7. Selectable power adjustment with an inbuilt switch
8. Steel body 70mm wide




DIMENSIONS

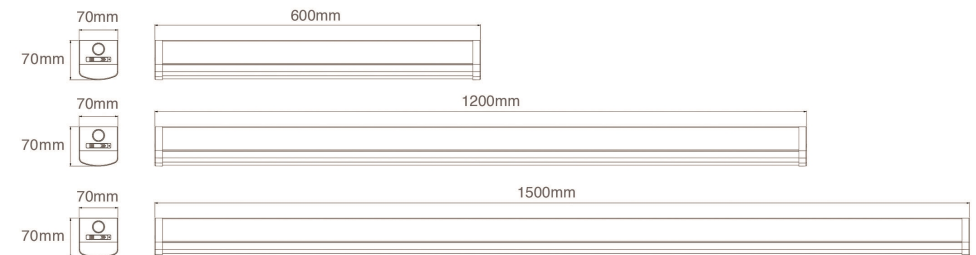



BL01-MS Sensor Batten Light

1. Quality white powder coated finish with robust polycarbonate diffuser
2. Large 16mm 2 terminal block, easy installation with central cable entry
3. High efficiency SMD LED chips, CRI > 80, 120 degree beam distribution
4. Sliders at both ends open, easy maintenance
5. Integral constant current non-dimmable LED driver
6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
7. Selectable power adjustment with an inbuilt switch
8. Steel body 70mm wide
9. Microwave sensor:
Detection Range: 4m
Detection Angle: 140 degrees
Duration Time: 2 minute, subsequent detection will restart the minutetimer.
Manual override function: On/off 10 times then the light will stay on after gone into manual override function. Turn the main power off for 30 seconds will turn off the Manual override function. When turn on power again after 30 seconds the light will work as AUTO mode (normal mode)




PRODUCT OVERVIEW

	BL01-0.6-12/15/18/20-3CCT-MS	BL01-1.2-24/30/35/40-3CCT-MS	BL01-1.5-33/43/52/60-3CCT-MS
Wattage	10/15/18/20W Switchable	24/30/35/40W Switchable	33/43/52/60W Switchable
Beam Angle	120°	120°	120°
Lumens Efficiency(lm/w)	100lm/w	100lm/w	100lm/w
Lumen(lm)	2000lm(Max)	4000lm(Max)	6000lm(Max)
IP Rated	IP20	IP20	IP20
CCT	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable
Materials	Steel (base), PC (diffuser)	Steel (base), PC (diffuser)	Steel (base), PC (diffuser)
Length	600mm	1200mm	1500mm
Size	W70xH70mm	W70xH70mm	W70xH70mm
Detection Range	4m	4m	4m
Duration Time	2 minutes	2 minutes	2 minutes
Detection Angle	140 degrees	140 degrees	140 degrees



DIMENSIONS

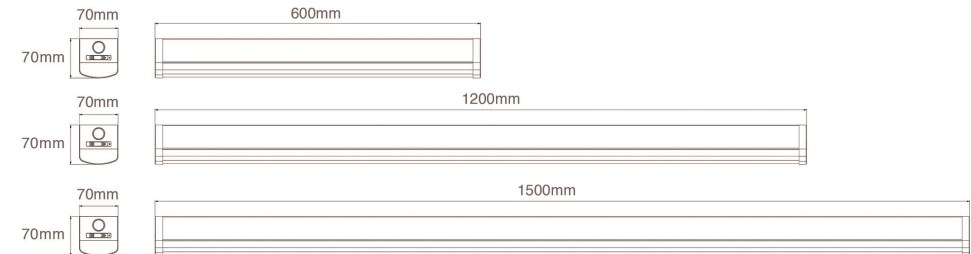




PRODUCT OVERVIEW


	TPL02-0.6-10/15/20-3CCT	TPL02-1.2-10/20/40-3CCT	TPL02-1.5-30/40/60-3CCT
Wattage	10/15/20W Switchable	10/20/40W Switchable	30/40/60W Switchable
Beam Angle	120°	120°	120°
Lumens Efficiency(lm/w)	100lm/w	100lm/w	100lm/w
Lumen(lm)	2000lm(Max)	4000lm(Max)	6000lm(Max)
IP Rated	IP65	IP65	IP65
IK Rated	IK06 (base), IK08 (diffuser)	IK06 (base), IK08 (diffuser)	IK06 (base), IK08 (diffuser)
CCT	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable
Materials	ABS(base), PC (diffuser)	ABS(base), PC (diffuser)	ABS(base), PC (diffuser)
Length	600mm	1200mm	1500mm
Size	W85×H80mm	W85×H80mm	W85×H80mm

TPL02 Batten Light

1. Rounded profile design, ABS body and UV stabilized PC diffuser
2. Stainless steel clips & screws, 20mm cable gland entry, IP65 and IK08 rated
3. Operating temperature -20 to +40 degree centigrade
4. Integral constant current non-dimmable LED driver
5. Selectable power adjustment with an inbuilt switch
6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
7. Multi-purpose commercial or industrial utility applications



DIMENSIONS

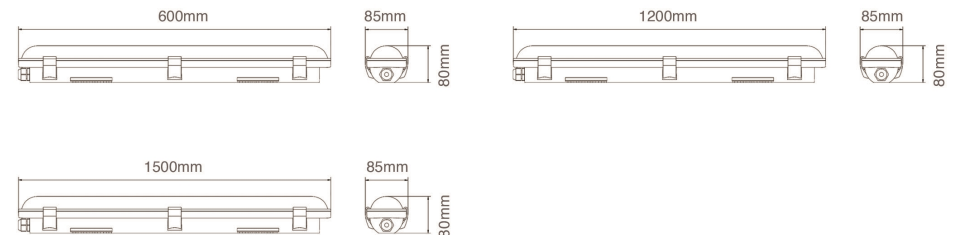

PRODUCT OVERVIEW

	TPL02-0.6-12/15/18/20-3CCT-MS	TPL02-1.2-24/30/35/40-3CCT-MS	TPL02-1.5-33/43/52/60-3CCT-MS
Wattage	10/15/18/20W Switchable	24/30/35/40W Switchable	33/43/52/60W Switchable
Beam Angle	120°	120°	120°
Lumens Efficiency(lm/w)	100lm/w	100lm/w	100lm/w
Lumen(lm)	2000lm(Max)	4000lm(Max)	6000lm(Max)
IP Rated	IP65	IP65	IP65
IK Rated	IK06 (base), IK08 (diffuser)	IK06 (base), IK08 (diffuser)	IK06 (base), IK08 (diffuser)
CCT	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable
Materials	ABS(base), PC (diffuser)	Steel (base), PC (diffuser)	Steel (base), PC (diffuser)
Length	600mm	1200mm	1500mm
Size	W85xH80mm	W85xH80mm	W85xH80mm



TPL02-MS Sensor Batten Light


1. Rounded profile design, ABS body and UV stabilized PC diffuser
2. Stainless steel clips & screws, 20mm cable gland entry, IP65 and IK08 rated
3. Operating temperature -20 to +40 degree centigrade
4. Integral constant current non-dimmable LED driver
5. Selectable power adjustment with an inbuilt switch
6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
7. Multi-purpose commercial or industrial utility applications
8. Microwave sensor:

Detection Range: 4m


Detection Angle: 140 degrees

Duration Time: 2 minute, subsequent detection will restart the minutetimer.

Manual override function: On/off 10 times then the light will stay on after gone into manual override function. Turn the main power off for 30 seconds will turn off the Manual override function. When turn on power again after 30 seconds the light will work as AUTO mode (normal mode)



DIMENSIONS

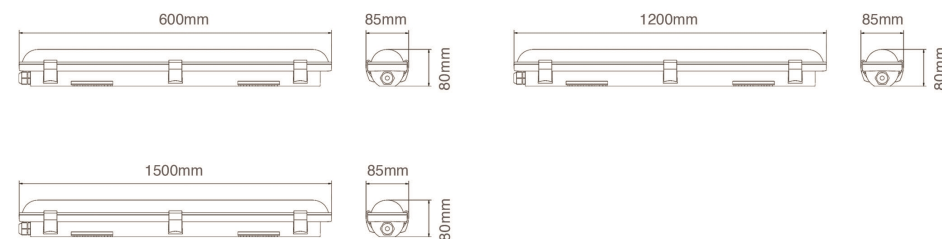




PRODUCT OVERVIEW

	TPL03-0.6-10/20-3CCT	TPL02-1.2-20/40-3CCT
Wattage	10/20W Switchable	20/40W Switchable
Beam Angle	120°	120°
Lumens Efficiency(lm/w)	100lm/w	100lm/w
Lumen(lm)	2000lm(Max)	4000lm(Max)
IP Rated	IP65	IP65
IK Rated	IK08	IK08
CCT	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable
Materials	PC(base), PC (diffuser)	PC(base), PC (diffuser)
Length	600mm	1200mm
Size	W110×H80mm	W110×H80mm

TPL03 Batten Light

1. Rounded profile design, PC body and UV stabilized PC diffuser
2. Stainless steel clips & screws, 20mm cable gland entry, IP65 and IK08 rated
3. Operating temperature -20 to +40 degree centigrade
4. Integral constant current non-dimmable LED driver
5. Selectable power adjustment with an inbuilt switch
6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
7. Multi-purpose commercial or industrial utility applications
8. Easy to install and easy to link with another LED batten



DIMENSIONS



3CCT ——— CW ——— NW ——— WW

Finish ——— White




PRODUCT OVERVIEW

	TPL03-0.6-10/20-3CCT	TPL02-1.2-20/40-3CCT
Wattage	10/20W Switchable	20/40W Switchable
Beam Angle	120°	120°
Lumens Efficiency(lm/w)	100lm/w	100lm/w
Lumen(lm)	2000lm(Max)	4000lm(Max)
IP Rated	IP65	IP65
IK Rated	IK08	IK08
CCT	3000K/4000K/6500K Switchable	3000K/4000K/6500K Switchable
Materials	PC(base), PC (diffuser)	PC(base), PC (diffuser)
Length	600mm	1200mm
Size	W110×H80mm	W110×H80mm

TPL03-MS Batten Light

1. Rounded profile design, PC body and UV stabilized PC diffuser
2. Stainless steel clips & screws, 20mm cable gland entry, IP65 and IK08 rated
3. Operating temperature -20 to +40 degree C
4. Integral constant current non-dimmable LED driver
5. Selectable power adjustment with an inbuilt switch
6. Easy selectable colour changing temperature (CCT) with an inbuilt switch 3000K, 4000K, 6500K
7. Multi-purpose commercial or industrial utility applications
8. Easy to install and easy to link with another LED batten
9. Microwave sensor:
Detection Range: 4m
Detection Angle: 140 degrees
Duration Time: 2 minute, subsequent detection will restart the minutetimer.
Manual override function: On/off 10 times then the light will stay on after gone into manual override function. Turn the main power off for 30 seconds will turn off the Manual override function. When turn on power again after 30 seconds the light will work as AUTO mode (normal mode)



DIMENSIONS



3CCT ——— CW ——— NW ——— WW

Finish ——— White



Panel Light



PL6060 Panel Light

1. Easy to install. Ideal to be built into system ceilings, offices, and can be used as a hanging fixture
2. Good quality aluminum, good heat sink
3. Lumen efficiency can up to 140lm/w
4. Optional to tri-colour on the light to help you to reduce the stock qty's
5. Innovative product, Light is even, no dark area
6. Optional to do UGR<19
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




PRODUCT OVERVIEW

	SM-PL6060	SM-PL6060-U
Wattage	25W/30W	25W/30W
Beam Angle	115°	115°
Lumens Efficiency(lm/w)	100-140lm/w	100-140lm/w
Lumen(lm)	2500-3500lm/3000-4200lm	2500-3500lm/3000-4200lm
PF	>0.9	>0.9
UGR	>20	<19
IP Rated	IP20	IP20
Size	595x595mm	595x595mm
Height	35mm	35mm



DIMENSIONS

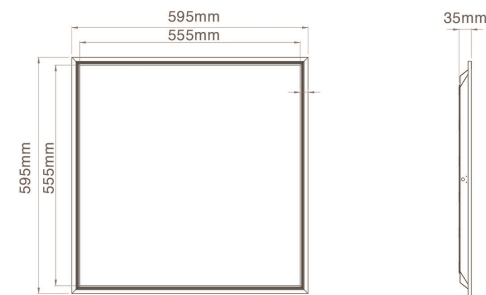



PL12030 Panel Light

1. Easy to install. Ideal to be built into system ceilings, offices, and can be used as a hanging fixture
2. Good quality aluminum, good heat sink
3. lumen efficiency can up to 140lm/w
4. Optional to tri-colour on the light to help you to reduce the stock qty's
5. Innovative product, Light is even, no dark area
6. Optional to do UGR<19
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




PRODUCT OVERVIEW

	SM-PL12030	SM-PL12030-U
Wattage	25W/30W	25W/30W
Beam Angle	115°	115°
Lumens Efficiency(lm/w)	100-140lm/w	100-140lm/w
Lumen(lm)	2500-3500lm/3000-4200lm	2500-3500lm/3000-4200lm
PF	>0.9	>0.9
UGR	>20	<19
IP Rated	IP20	IP20
Size	1195x295mm	1195x295mm
Height	35mm	35mm



DIMENSIONS

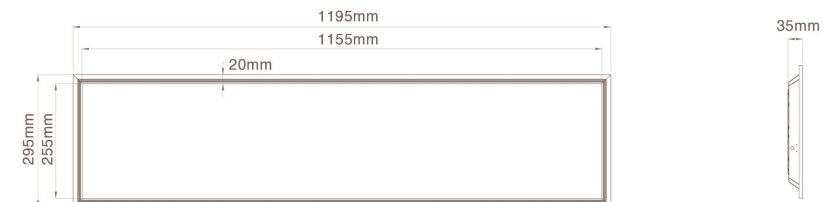



PL12060 Panel Light

1. Easy to install. Ideal to be built into system ceilings, offices, and can be used as a hanging fixture
2. Good quality aluminum, good heat sink
3. lumen efficiency can up to 140lm/w
4. Optional to tri-colour on the light to help you to reduce the stock qty's
5. Innovative product, Light is even, no dark area
6. Optional to do UGR<19
7. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
8. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




PRODUCT OVERVIEW

	SM-PL12060	SM-PL12060-U
Wattage	52W/60W	52W/60W
Beam Angle	115°	115°
Lumens Efficiency(lm/w)	100-140lm/w	100-140lm/w
Lumen(lm)	5200-7280lm/6000-6400lm	5200-7280lm/6000-6400lm
PF	>0.9	>0.9
UGR	>20	<19
IP Rated	IP20	IP20
Size	1195x595mm	1195x595mm
Height	35mm	35mm



DIMENSIONS

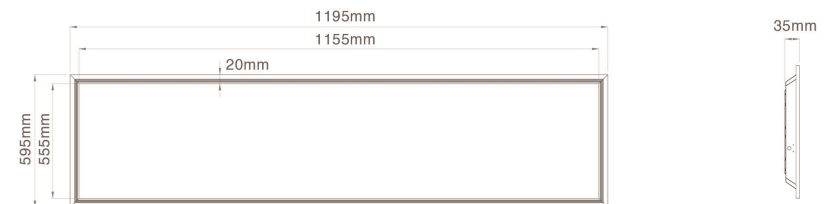





PRODUCT OVERVIEW


	SM-PL6060-2.5	SM-PL6060-2.5-U
Wattage	25W/30W	25W/30W
Beam Angle	115°	115°
Lumens Efficiency(lm/w)	100-120lm/w	100-120lm/w
Lumen(lm)	2500-3000lm/3000-3600lm	2500-3000lm/3000-3600lm
PF	>0.9	>0.9
UGR	>20	<19
IP Rated	IP20	IP20
Size	595x595mm	595x595mm
Height	25mm	25mm

PL6060-2.5 Panel Light

1. Easy to install. Ideal to be built into system ceilings, offices, and can be used as a hanging fixture
2. Good quality aluminum, good heat sink
3. lumen efficiency can up to 140lm/w
4. Optional to tri-colour on the light to help you to reduce the stock qty
5. Innovative product, Light is even, no dark area
6. Optional to do UGR<19
7. Ultra thin, the height of the light is only 25mm, easy to load more on each shipment, reduce transportation cost
8. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
9. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT



DIMENSIONS

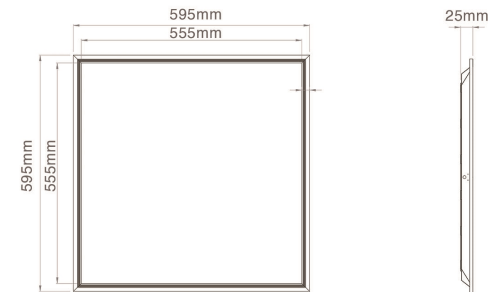



PRODUCT OVERVIEW

	SM-PL12030-2.5	SM-PL12030-2.5-U
Wattage	25W/30W	25W/30W
Beam Angle	115°	115°
Lumens Efficiency(lm/w)	100-120lm/w	100-120lm/w
Lumen(lm)	2500-3000lm/3000-3600lm	2500-3000lm/3000-3600lm
PF	>0.9	>0.9
UGR	>20	<19
IP Rated	IP20	IP20
Size	1195x295mm	1195x295mm
Height	25mm	25mm

PL12030-2.5 Panel Light

1. Easy to install. Ideal to be built into system ceilings, offices, and can be used as a hanging fixture
2. Good quality aluminum, good heat sink
3. lumen efficiency can up to 140lm/w
4. Optional to tri-colour on the light to help you to reduce the stock qty
5. Innovative product, Light is even, no dark area
6. Optional to do UGR<19
7. Ultra thin, the height of the light is only 25mm, easy to load more on each shipment, reduce transportation cost
8. Dimmer Type: Trailing edge, 0-10V, DALI / DSI, Smart control
9. Approved with SAA, C-tick, CE, LM79, TM21, LM80, ISTMT




3 CCT ——— CW ——— NW ——— WW

Finish ——— White



DIMENSIONS

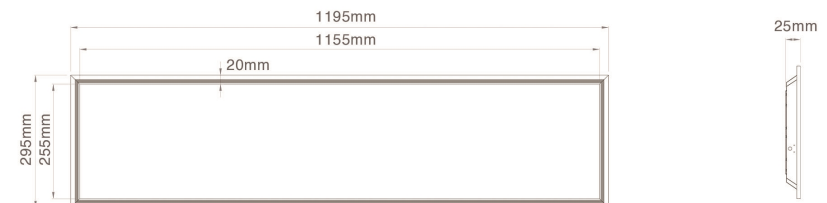

Smart Light





PRODUCT OVERVIEW


	DL01-03-F-TY	DL01-04-F-TY	DL01-06-F-TY	DL01-08-F-TY
Wattage	8W/10W	12W	15W	18W
Beam Angle	100°	100°	100°	100°
Lumens Efficiency(lm/w)	90lm/w	90lm/w	100lm/w	100lm/w
Lumen(lm)	720lm/ 900lm	1080lm	1500lm	1800lm
IP Rated	IP44	IP44	IP44	IP44
CCT	RGB+CCT, CCT	RGB+CCT, CCT	RGB+CCT, CCT	RGB+CCT, CCT
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	110-130mm	150-180mm	200-220mm
Size	∅ 115xH60mm	∅ 140xH65mm	∅ 190xH70mm	∅ 230xH95mm

DL01-F-TY Smart Light

1. Materials: Plastic + Aluminum, IC-4 Rated
2. Lumen efficiency can up to 100lm/w
3. Control the light anywhere via App or voice control
4. Tuneable CCT, dim from warm white to daylight
5. Control the light wherever you are as long as it has network.
6. Connect multi-lights on the same devices. Either can control these lights together, or operate the lights separately.
7. Amount of devices is limited to your WI-FI router.



DIMENSIONS

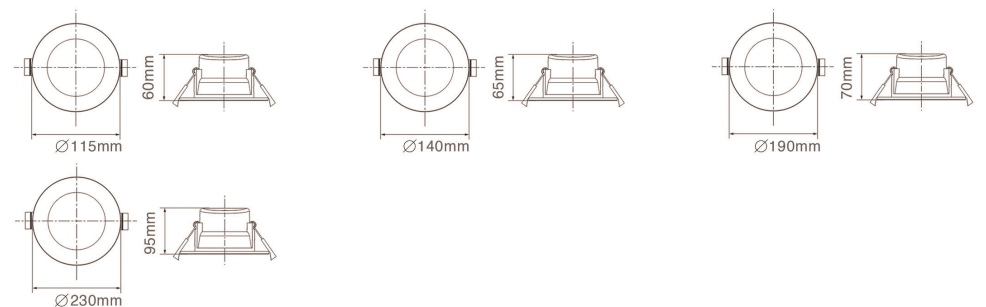




PRODUCT OVERVIEW


	DL01-03-R-TY	DL01-06-R-TY	DL01-08-R-TY
Wattage	8W/10W	15W	18W
Beam Angle	100°	100°	100°
Lumens Efficiency(lm/w)	90lm/w	100lm/w	100lm/w
Lumen(lm)	720lm/ 900lm	1500lm	1800lm
IP Rated	IP40	IP40	IP40
CCT	RGB+CCT, CCT	RGB+CCT, CCT	RGB+CCT, CCT
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	150-180mm	200-220mm
Size	∅115xH70mm	∅190xH76mm	∅230xH82mm


DL01-R-TY Smart Light

1. Materials: Plastic + Aluminum, IC-4 Rated
2. Lumen efficiency can up to 100lm/w
3. Control the light anywhere via App or voice control
4. Tuneable CCT, dim from warm white to daylight
5. Control the light wherever you are as long as it has network.
6. Connect multi-lights on the same devices. Either can control these lights together, or operate the lights separately.
7. Amount of devices is limited to your WI-FI router.



DIMENSIONS

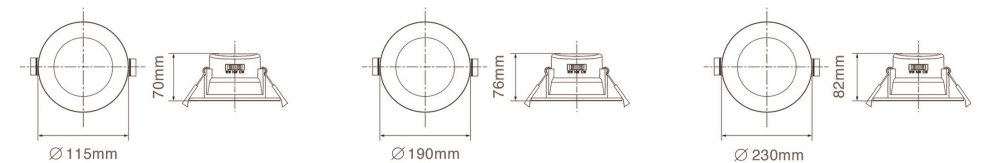


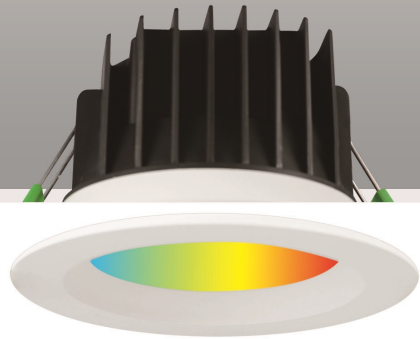


PRODUCT OVERVIEW


	DL41-03-F-TY	DL41-03-R-TY
Wattage	10W	10W
Beam Angle	100°	100°
Lumens Efficiency(lm/w)	90lm/w	90lm/w
Lumen(lm)	900lm	900lm
IP Rated	IP54	IP54
CCT	RGB+CCT, CCT	RGB+CCT, CCT
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	90-100mm
Size	∅108xH57mm	∅108xH65mm


DL41-TY Smart Light

1. Materials: Plastic + Aluminum, IC-4 Rated
2. Lumen efficiency can up to 100lm/w
3. Control the light anywhere via App or voice control
4. Tuneable CCT, dim from warm white to daylight
5. Control the light wherever you are as long as it has network.
6. Connect multi-lights on the same devices. Either can control these lights together, or operate the lights separately.
7. Amount of devices is limited to your WI-FI router.



DIMENSIONS

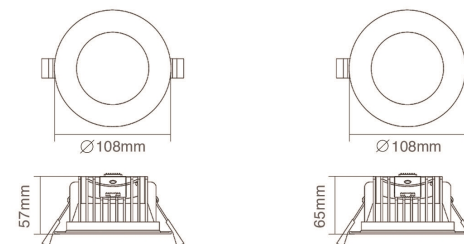


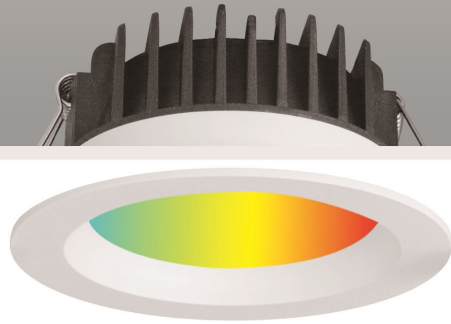


PRODUCT OVERVIEW


	DL03-03-F-TY	DL03-03-R-TY
Wattage	10W	10W
Beam Angle	100°	100°
Lumens Efficiency(lm/w)	90lm/w	90lm/w
Lumen(lm)	900lm	900lm
IP Rated	IP54	IP54
CCT	RGB+CCT, CCT	RGB+CCT, CCT
Materials	Aluminum Coated Plastic	Aluminum Coated Plastic
Cut-out	90-100mm	90-100mm
Size	∅ 108xH40mm	∅ 108xH48mm


DL03-03-TY Smart Light

1. Materials: Plastic + Aluminum, IC-4 Rated
2. Lumen efficiency can up to 100lm/w
3. Control the light anywhere via App or voice control
4. Tuneable CCT, dim from warm white to daylight
5. Control the light wherever you are as long as it has network.
6. Connect multi-lights on the same devices. Either can control these lights together, or operate the lights separately.
7. Amount of devices is limited to your WI-FI router.



DIMENSIONS

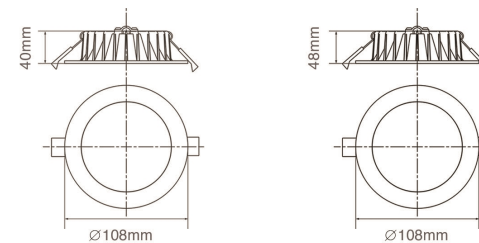


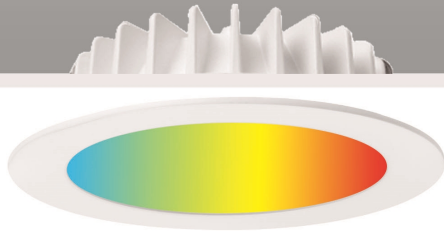


PRODUCT OVERVIEW


	DL04-03-TY
Wattage	10W
Beam Angle	100°
Lumens Efficiency(lm/w)	90lm/w
Lumen(lm)	900lm
IP Rated	IP44
CCT	RGB+CCT, CCT
Materials	Die-cast Aluminum
Cut-out	90-105mm
Size	∅114xH30mm

DL04-TY Smart Light

1. Materials: Die-cast Aluminum, IC-4 Rated
2. Lumen efficiency can up to 100lm/w
3. Control the light anywhere via App or voice control
4. Tuneable CCT, dim from warm white to daylight
5. Control the light wherever you are as long as it has network.
6. Connect multi-lights on the same devices. Either can control these lights together, or operate the lights separately.
7. Amount of devices is limited to your WI-FI router.
8. Super slim design, application to many special roof




DIMENSIONS

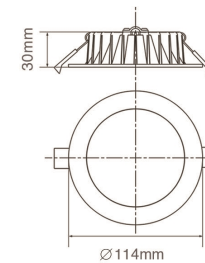



CL08-TY Smart Light

1. Materials: PC
2. Lumen efficiency can up to 100lm/w
3. Control the light anywhere via App or voice control
4. Tuneable CCT, dim from warm white to daylight
5. Control the light wherever you are as long as it has network.
6. Connect multi-lights on the same devices. Either can control these lights together, or operate the lights separately.
7. Amount of devices is limited to your WI-FI router.
8. Up light: RGB adjustable, Down Light: CCT adjustable



PRODUCT OVERVIEW

	CL08-01-TY	CL08-02-TY
Wattage	20W (CCT 16W+RGB 4W)	30W (CCT 24W+RGB 6W)
Beam Angle	160°	160°
Lumens Efficiency(lm/w)	90lm/w	90lm/w
IP Rated	IP20	IP20
CCT	Down 3000-6500K Up RGB	Down 3000-6500K Up RGB
Materials	PC	PC
Size	∅ 280xH55mm	∅ 380xH65mm



DIMENSIONS

